HÄFELE

Maximising
the value of space.
Together.


THE COMPLETE HÄFELE



Furniture Fittings



The first 100 years.

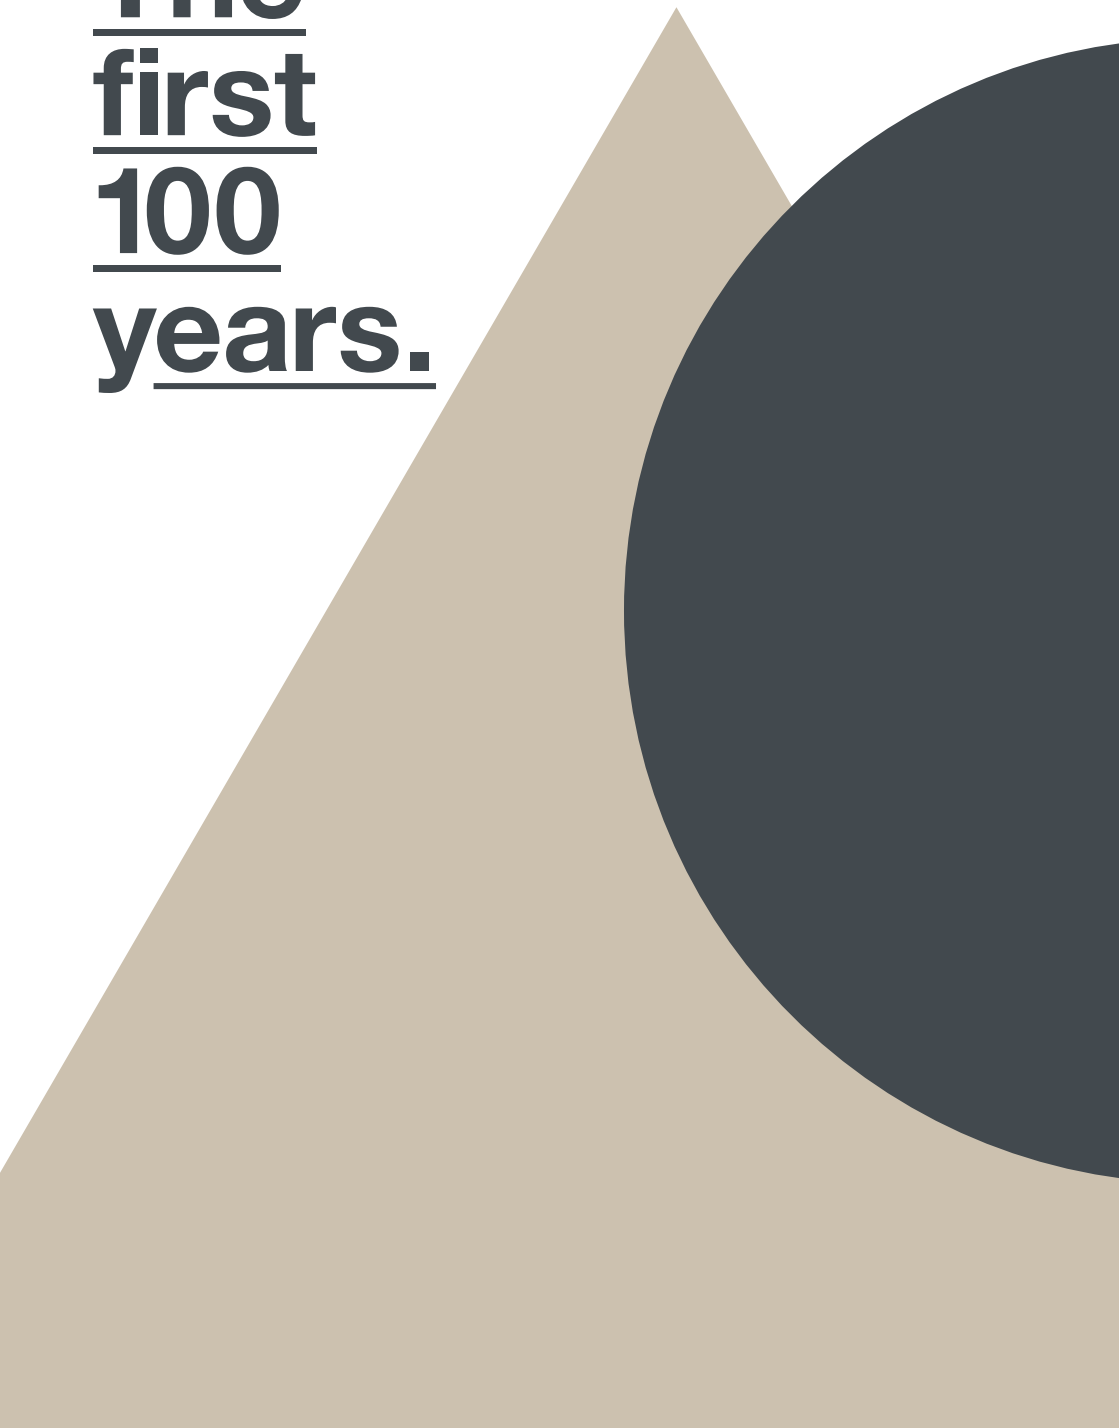



Dear Reader,

2023 marks a huge **milestone in the history** of our company. Häfele is now **one hundred years old**, and we are taking the opportunity of this extraordinary anniversary to pause and reflect intensively on the growth that's taken us from a small hardware store in the Black Forest (Germany) to a global company.

In addition to extraordinary people who have guided the company's fortunes with far-sightedness, what stood out prominently for us was our ability to forge **strong partnerships** that have been fundamental in shaping our progress and achieving the milestones we stand before today. We sought to build an ecosystem that fostered a sense of community, respect, and shared purpose and over the years, this approach has proven to be the cornerstone of our achievements. Together, we have weathered economic downturns, navigated shifting market trends, and embraced technological advancements.

Therefore, it wouldn't be incorrect to state that it has been **courage and optimism**, above all that have carried us as an organization through stormy times. These qualities have also defined Häfele from the very beginning and characterised the founders back in the day. The original 2-man business which was a specialist hardware store led by **Adolf Häfele and Hermann Funk**, has developed into a global company, Häfele SE & Co KG, with subsidiaries in **38 countries, 8,000 employees** and more than **1,50,000 customers**.

Standing on the threshold of the next phase of our journey, we realise that it was courage and optimism along with an **unwavering alliance with our employees, vendors, suppliers and above all our customers**, that enabled us to change continuously, to break new ground and not only to think ahead, but also to actively implement these forward-thinking ideas.

As we foray into the next 100 years, Hafele presents its future-oriented brand purpose (which will be at the very core of our strategic outlook) - **"Maximising the value of space. Together."** The new brand claim aims to consolidate our attitude, our competences, the developments inside and outside of our company and the strategic decisions we have made in the past years and decades. And as we transition between the first and second century, we aim to pour our collective experiences that have brought us here into a connected mould – our purpose, that will function as a starting point for a shared journey into the future and will act as a powerful compass for us.

Needless to say, we excitedly look forward to shaping this - perhaps new, different, surprising - future together with you!

With Best Regards,

Frank Schloeder
Managing Director, Hafele South Asia

HÄFELE

THE PATH OF HÄFELE **THAT TRANSLATED INTO SYMBOLS**

For the 100-year anniversary of Häfele, we have expressed two things: The pride in the successful path that the company has taken up to today, and optimism that the path to the future will be just as successful because we have the courage to continuously reinvent ourselves. This is why the anniversary design is based on the roots of the company and is at the same time open and flexible. A modern forward-looking code that gives our ambitions a visual expression



MAXIMIZING THE VALUE OF SPACE. **TOGETHER.**

In conjunction with its 100-year anniversary celebrations this year, that kicked off at Interzum 2023, Hafele unveiled a new purpose line **"Maximizing the value of Space. Together.",** which resonates strongly with us. We aim to strengthen our brand position in South Asia by emphasizing on the meaning of this purpose line, i.e. Hafele strives to provide the best of the best **(maximizing)** benefits **(value)** through its versatile solutions and services for different living and working spaces ranging from hotels, offices, institutes and homes as well as different interior applications like kitchens, living rooms & bedroom furniture, doors and interior partitions, wardrobes as well as furniture and room lighting. And this we strive to achieve in partnership **(together)** with all entities within our ecosystem from our suppliers, partners (Industry and Project), channels (distributors, dealers and franchisees), influencers (architects, designers, contractors and carpenters) right up to the final beneficiary i.e., our end customer.

In short, with our new purpose line we aim to co-create an environment for our endearing customers where they can enjoy the multiplied benefits of their living and working spaces.


Hafele Worldwide



With its origin in 1923 in a small town named 'Nagold' from the Swabian region of Germany that nurses a passion for hardware technology, it is no surprise that Häfele has lived up to its roots through a successful presence in the architectural and furniture hardware industry for over 10 decades now. Today, Hafele's worldwide penetration includes 38 subsidiaries across Europe, America, Asia, Australia and New Zealand. With these subsidiaries and numerous other sales organisations, Häfele operates in over 150 countries. The Häfele headquarters, 4 manufacturing units and 10 sales offices are located within Germany; while 1 manufacturing unit is located at Budapest, Hungary. The company also owns one of the largest and most sophisticated warehouses in its home country. The Häfele worldwide workforce is empowered by a base of over 8100 employees.

The group services over 150,000 customers across the globe through its extensive range of hardware products and a comprehensive logistics system. In addition to this, Häfele also provides consultative services to its customers, educating and advising them about buying the correct hardware as per their requirements. With this level of market penetration and ability to handle worldwide demand, it comes as no surprise that the company is an authority in the segment of home interior solutions; what is pleasantly surprising, though, is that in spite of its size, Häfele still remains a family owned and run business with a unique, friendly and value-centric work culture which is strongly followed among all its subsidiaries.

Hafele India

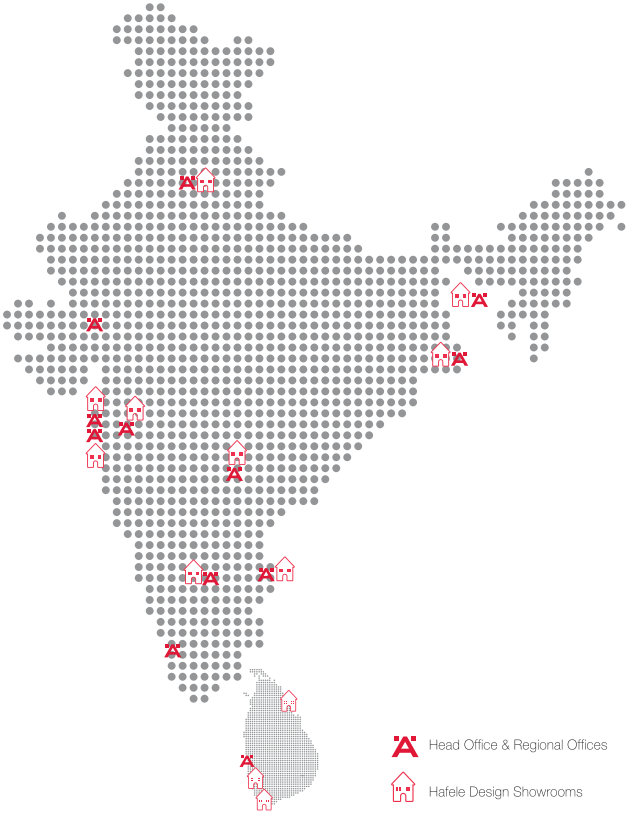

Häfele India is a wholly-owned subsidiary of the Häfele Global network and has been operating in India since 2003. The ability of the company to understand the diverse Indian market has made it an authority in the field of architectural hardware, furniture and kitchen fittings and accessories. The company also has a strong presence in synergized product categories namely Home Appliances, Interior Lighting, Water Solutions and Surfaces catering to the focused demand from these industries.

The subsidiary has a strong nation-wide presence with offices in Mumbai, Pune, Ahmedabad, Bangalore, Chennai, Hyderabad, Cochin, Delhi and Kolkata. It has full-scale operations in Sri Lanka and Bangladesh with Regional offices and Design Showrooms in both the countries; and has also spread its operations to other regions of South Asia including Nepal, Bhutan and Maldives.


Häfele's design showrooms are hubs of international home interior trends and cutting-edge designs presented in a world-class environment, where customers can see home solutions in their inherent applications. These showrooms function as a one-stop-shop for all home interior and improvement needs - from providing in-depth technical advice to kitchen and wardrobe designing services through a team of experts stationed at the showroom.


Häfele India services its customers with a base of 1500 employees, a well-networked Franchise base of over 180 Partners along with over 500+ direct dealers and 90+ distributors who in turn cater to over 12000+ sub dealers. The subsidiary has a sophisticated Logistics centre in Mumbai along with distribution centres in Delhi, Bangalore, Kolkata and Colombo respectively.








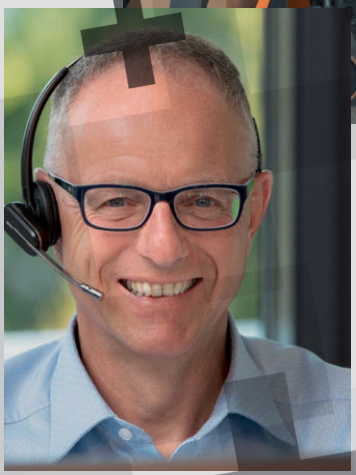

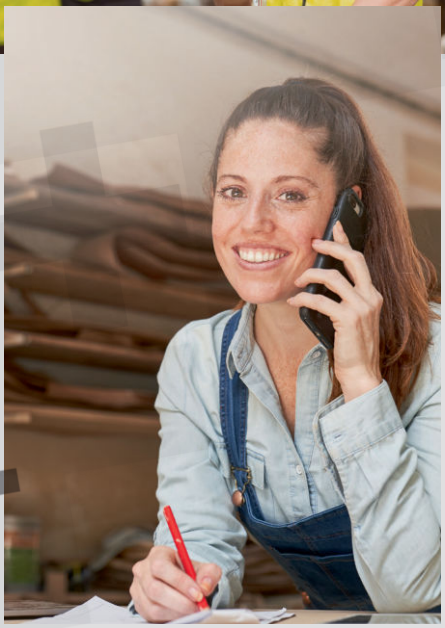

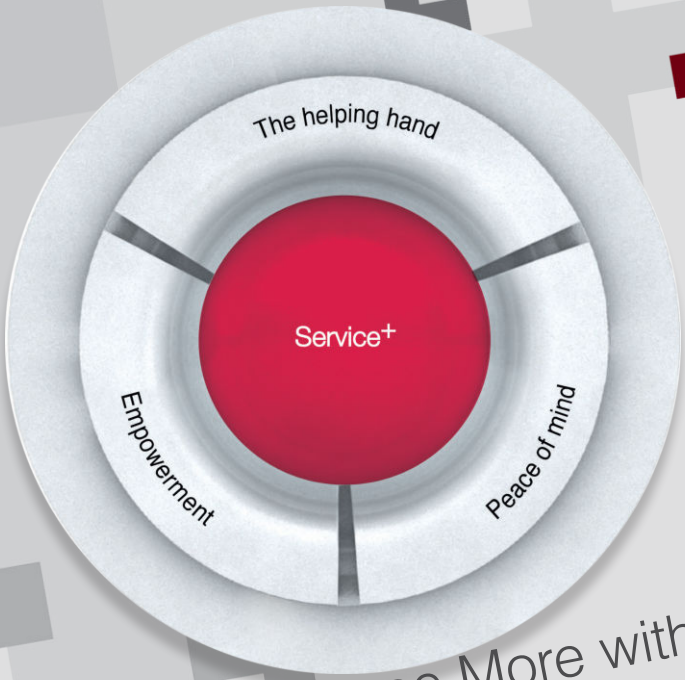

Experience More with Service+

Our customers' working environment is becoming increasingly complex and their market is becoming ever more demanding. This drives our motivation to do everything in our power to help our customers be successful. And to demonstrate that Häfele is the right partner in these challenging times, we want to accompany our customers throughout their entire business process and give them added strength in every phase of their business. We don't just want to sell our products, we also want to provide the highest level of service.

We have now divided our services into two categories: Standard Services which we provide to our customers as a matter of course when they choose our products. For example, a high availability of our goods and punctual delivery. And then there is Service+ which constitutes of services that give our customers considerable added value in terms of building expertise, increasing productivity or providing individual customised solutions. These services require a considerable amount of time and effort to develop and implement and are designed to enable our customers to regard them as worthwhile investments.

The aim is to create solid long-term foundations for our comprehensive service promise and to make Häfele an indispensable partner for our customers. The focus here lies not so much on us and on what we do – but rather, on the benefits derived by our customers. We want to empower them with opportunities to develop and expand their skills – both as masters of their trade and as entrepreneurs. We want to support them in the planning and realisation of their projects and relieve them of as much work as possible, thereby providing them with a helping hand to use their most valuable resource – time – as efficiently as possible. And we aim to give our customers peace of mind and the assurance that even after the end of a successful project completion, we will continue to be there for them as a reliable partner, shouldering responsibility.



The Pillars of Service+

In order to support you as comprehensively as possible, we have assigned the Plus Services to individual stages of your work process in a total of four themed pillars. We start with the transfer of knowledge and accompany you via planning and production to installation and maintenance.



Empowering customers with

Service+ Knowledge

Includes service offerings that provide inspiration and expertise to our customers about the Häfele product range. Through these, we enable our customers to use Häfele products profitably and at the same time remain at the cutting edge of technological development. One example of this is the Häfele Academy, which imparts knowledge about complex products and new technologies to our customers via seminars and trainings.

Providing a helping hand to customers with

Service+ Planning & Customised

Includes service offerings like space, design planning and customisations that make life easier for our customers and support their design vision. An example of this is Hafele's Lighting Design Service which helps our customers curate a lighting plan, following a customised approach, that enhances and brings out the true functionality of the interior space as per requirement.





Lending a “Peace-of-mind” experience through

Service+ Assist

Includes service offerings that provide support and assistance to our customers, whether digitally or on site. An example of this is the complete assembly and installation service for more complex and maintenance-intensive products done by our Meister certified and trained technicians.

One Stop Shop



Amidst the chaotic yet fast growing hardware market; Häfele stands apart as a complete solution provider and not just a brand that sells hardware. We introduced related product segments like lighting, appliances, digital security solutions and home surfaces to our customers so that they could get everything from one source and at their expected standards of quality and functionality. Today, these are established product verticals that are contributing to our Brand image of a “complete solution provider” by each passing day.

This proposition of being a “complete solution provider” is strongly backed by our service-oriented approach which includes anything from designing (in case of kitchens and wardrobes) to technical advice, hardware scheduling, training, warranties and most importantly after-sales support. This allows us to walk the length of the entire project duration by aiding and supporting our customers at every stage. We can execute the most abstract solutions in any interior space by integrating functionality with cutting-edge designs, ably backed by our unified service network to ensure continued support.

Furniture Handles and Knobs
Page 1.01 to 1.11

1

Knockdown Connectors and Shelf Supports
Page 2.01 to 2.10

2

Hinges
Page 3.01 to 3.15

3

Flap Fittings and Lid Stays
Page 4.01 to 4.09

4

Furniture Locks and Locking System
Page 5.01 to 5.07

5

Table Fittings and Counter Top Extension
Page 6.01 to 6.04

6

Bedroom Fittings and Accessories
Page 7.01 to 7.13

7

Cabinet Hangers and Levelers
Page 8.01 to 8.07

8

Wardrobe Fittings and Accessories
Page 9.01 to 9.15

9

Drawer Runners
Page 10.01 to 10.02

10

Table and Desk Fittings
Page 11.01 to 11.05

11

Screws and Jigs
Page 12.01 to 12.02

12

HÄFELE



Furniture Handles, Profile Handles and Knobs



Furniture Handles (Stainless Steel Matt - Grade 304)

8 mm Round Bar Handle



Article No.	C to C
116.10.051	96 mm
116.10.052	128 mm
116.10.053	160 mm
116.10.055	224 mm
116.10.058	320 mm

10 mm Round Bar Handle



Article No.	C to C
117.40.051	96 mm
117.40.052	128 mm
117.40.053	160 mm
117.40.055	224 mm

10 mm Round Bar Handle



Article No.	C to C
115.77.051	96 mm
115.77.052	128 mm
115.77.053	160 mm
115.77.055	224 mm
115.77.058	320 mm

Special Order

10 mm Round x 10 mm Square Handle



Article No.	C to C
115.95.005	224 mm
115.95.008	320 mm

10 x 10 mm Square Handle



Article No.	C to C
115.39.008	320 mm

12 x 12 mm Square Handle & 6mm thickness



Article No.	C to C
100.68.001	96 mm
100.68.002	128 mm
100.68.003	160 mm
100.68.005	224 mm
100.68.008	320 mm

10 mm Round Bow Handle



Article No.	C to C
100.69.001	96 mm
100.69.002	128 mm
100.69.003	160 mm
100.69.005	224 mm

10 mm Round Rail Bar Handle



Article No.	C to C
101.20.071	96 mm
101.20.072	128 mm
101.20.073	160 mm
101.20.075	224 mm
101.20.078	320 mm

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Handles (Stainless Steel Matt - Grade 304 and Aluminium)

10 x 10 mm Furniture Handle
Height : 24mm



Article No.	C to C
115.68.002	128mm
115.68.004	192mm
115.68.008	320mm
115.68.014	640mm

25 x 12 mm Furniture Handle
Height : 40mm



Article No.	C to C
115.46.002	128mm
115.46.004	192mm
115.46.008	320mm
115.46.014	640mm

Dia 14 Mm, Stainless Steel Matt
Hollow Bar Handle,



Article No.	C to C
109.85.034	96mm
109.85.036	160mm
109.85.038	224mm
109.85.039	320mm

Special Order



Till Stock Last

Article No.	C to C
110.71.931	96 mm
110.71.933	160 mm
110.71.935	224 mm
110.71.938	320 mm

Finish: Polished Chrome
Aluminium



Till Stock Last

Article No.	C to C
110.46.261	160 mm
110.46.262	192 mm

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Handles (Black)

Finish: Black Matt

New



Article No.	C to C
103.84.100	160 mm
103.84.101	224 mm
103.84.102	320 mm

New



Article No.	C to C
100.00.810	164 mm

New



Article No.	C to C
103.84.110	50 mm Dia

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Handles (Zinc Alloy)

Finish: Polished Stainless Steel



Article No.	C to C
110.08.011	96mm

Finish: Polished Stainless Steel



Article No.	C to C
103.84.061	96mm

Finish: Chrome Plated Polished



Article No.	C to C
110.34.286	160 mm
110.34.287	192 mm

Finish: Nickel Plated Brushed



Article No.	C to C
110.34.686	160 mm
110.34.687	192 mm



Article No.	C to C	Finish
110.34.271	32 mm	CP
110.34.274	96 mm	CP

Finish: Nickel Plated Brushed



Article No.	C to C
110.34.638	224 mm

Finish: Chrome Plated Polished



Article No.	C to C
110.34.257	160 mm and 192 mm

Finish: Chrome Plated Polished



Article No.	C to C
106.61.214	160 mm and 192 mm
106.61.217	288 mm and 320 mm

Can be used with two different sizes
Finish: Polished chrome



Article No.	C to C
101.11.257	228 mm and 320 mm
101.11.259	448 mm and 480 mm

Can be used with two different sizes.
Finish: Polished chrome



Article No.	C to C
101.11.238	320 mm and 352 mm

Finish: Nickel Plated Brushed



Article No.	C to C
106.61.014	160 mm and 192 mm
106.61.017	288 mm and 320 mm

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Handles (Porcelain)

Finish: Antique Brass/black And Gold



Article No.	C to C
121.50.903	128 mm
121.50.902	96 mm
121.50.901	64 mm

Special Order

Finish: Antique Brass/ Crack Finish



Article No.	C to C
121.40.813	128 mm
121.40.812	96 mm
121.40.811	Knob

Finish: Antique Brass/ Crack Finish



Article No.	C to C
121.87.002	128 mm
121.87.001	Knob

Finish: Antique Brass/ White Finish



Article No.	C to C
121.00.003	160 mm
121.00.002	128 mm
121.00.001	Knob

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Designer Furniture Knobs

Finish: Stainless Steel Matt



Article No.	Size
134.79.002	25 mm

Finish: Stainless Steel Matt



Article No.	Size
134.28.000	30 mm

Finish: Stainless Steel Matt



Article No.	Size
134.81.002	25 mm

Special Order

Finish: Stainless Steel Matt



Article No.	Size
134.29.004	30 mm



Furniture knob, Timeless
matt brushed,
Height: 28 mm,
Knob Ø: 20 mm

Article No.	Size
155.01.512	Dia 20 mm



Stainless Steel Matt Round Knob

Article No.	Size
134.28.080	Dia 25x25 mm



Stainless Steel Matt Round

Article No.	Size
134.28.100	Dia 32x26 mm



Article No.	Finish
110.35.271	Zinc Alloy CP
110.35.771	NB
110.35.671	White Matt
110.35.371	Black Matt

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Flush Handles (Aluminium)



Article No.	Size	Finish
161.30.600	110x15mm	Nickel Matt
161.30.200	110x15mm	CP

Finish : Aluminium Coloured end piece and Silver Coloured centre piece



Article No.	C to C
155.01.130	96 mm

Finish : Aluminium Coloured / Silver Coloured



Article No.	C to C
151.76.902	128 mm

Special Order

Finish: Stainless Steel coloured



Article No.	C to C
151.86.021	128 mm
151.86.022	160 mm
151.86.023	192 mm
151.86.027	320 mm

Flush Handles,
Luxe Zinc Alloy Aluminium Coloured



Article No.	C to C
152.13.900	29 x 80 mm

Pressing the lower section, projects the upper section outside. The unique design and gives complete grip to open the furniture fronts.





Article No.	Size	Finish
152.16.710	112 x 87 mm	White Coloured
152.16.711	152 x 87 mm	

Article No.	Size	Finish
152.16.000	112 x 87 mm	Stainless Steel Coloured
152.16.001	152 x 87 mm	

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Furniture Profile Handles (Aluminium)

Finish: Silver Anodized




Article No.	Length
126.20.905	2500 mm

Finish: Silver Anodized



Article No.	Length
126.21.902	2500 mm




Finish: Silver Anodized

Article No.	Length
126.07.933	3000 mm


Finish: Stainless Steel Hairline

Article No.	Length
126.07.033	3000 mm

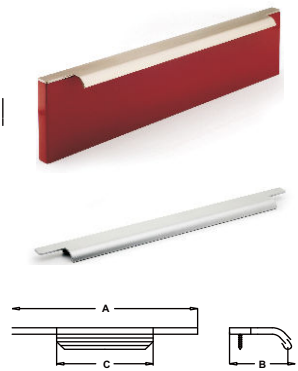

Article No.	Size	Finish
126.26.273	300mm	Polished Chrome

Profile Handle for Wood Sliding Door

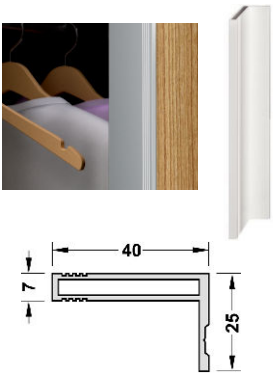

Material : Aluminium

Finish : Silver Anodized

Article No.	Length
126.12.900	2500 mm

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Profile Handles (Aluminium)

Finish: Silver Anodized






Article No.	Length
126.35.945	2500 mm

Finish: Silver Anodized






Article No.	Length
126.39.925	2500 mm

Finish: Silver Anodized
End Cap For 126.39.925
Plastic Silver Coloured







Article No.	
126.39.997	RHS
126.39.998	LHS

Special Order

Grip Profile Handle
Material: Aliminium Anodized






Article No.	Length
126.34.925	2500 mm


Grip Profile Handle
Material: Aliminium Anodized





Article No.	Length
126.27.908	3000 mm

Finish: Silver Anodized



A= 43mm
B= 20mm
C=1.6mm

Article No.	Length
126.27.907	3000 mm

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Grip Profile Handles

L shape Grip Profile Handles

Finish: Silver Anodized





Article No.	Length
126.37.911	3000 mm

Finish: White Coloured



Article No.	Length
126.37.700	2500 mm

Finish: Black Coloured




Article No.	Length
123.37.301	2500 mm

Special Order

C shape Grip Profile Handles

Finish: Silver Coloured





Article No.	Length
126.36.900	2500 mm

Finish: White Coloured



Article No.	Length
126.36.700	2500 mm


Finish: Black Coloured



Article No.	Length
126.36.310	2500 mm

Fixing Bracket For L and C shape Grip Profile handles






Article No.	Finish
126.37.990	Stainless Steel Matt

Fixing Bracket For L and C shape Grip Profile handles





Article No.	Finish
126.37.988	Stainless Steel Matt

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Connectors and Cover caps for C and L shape Grip Profile Handles

Outward 90° Connector For C-shape Grip Profile



Article No.	Finish
126.37.986	Silver Coloured
126.37.771	White Coloured
126.37.371	Black Coloured

Outward 90° Connector For L-shape Grip Profile



Article No.	Finish
126.37.985	Silver Coloured
126.37.775	White Coloured
126.37.375	Black Coloured

Cover cap For L-shape Grip Profile



Article No.	Finish
126.37.997	RHS, Silver
126.37.998	LHS, Silver
126.37.977	RHS, White
126.37.978	LHS, White
126.37.937	RHS, Black
126.37.938	LHS, Black

Inward 90° Connector For C-shape Grip Profile



Article No.	Finish
126.37.981	Silver Coloured
126.37.770	White Coloured
126.37.370	Black Coloured

Inward 90° Connector For L-shape Grip Profile



Article No.	Finish
126.37.980	Silver Coloured
126.37.774	White Coloured
126.37.374	Black Coloured

Cover cap For C-shape Grip Profile



Article No.	Finish
126.37.996	Silver
126.37.976	White
126.37.936	Black

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Knockdown Connectors and Shelf Supports



Minifix Connectors

Minifix 15
Connector Housing for wood thickness from 12 to 23mm
Finish: Zink Alloy



Article No.	Finish
262.26.532	15 dia/ wood 15 mm Nickel Plated
262.26.534	15 dia/ wood18 mm Nickel Plated
262.26.036	15 dia / wood 23 mm Zinc Bright **(Till Stock Last)**

Econo S Bolt
Steel Galvanized with clip-on plastic sleeve, 5mm Euro thread. Thread length 11mm.
Sleeve-Polystyrene Red.



Article No.	Drilling distance
262.27.679	24 mm
262.28.679	34 mm

Special Order

Minifix Connectors

Econo Bolt - Machine Thread Steel Galvanized 5mm machine thread. Thread length 11mm.



Article No.	Drilling distance
262.28.643	34 mm

Econo Bolt-Machine Thread (Steel Galvanized M6x9 mm)



Article No.	Drilling distance
262.28.319	34 mm

Econo Bolt - Euro Thread
Steel Galvanized 5mm Euro thread. Thread length 11mm.



Article No.	Drilling distance
262.28.624	34 mm

Cover Cap

Glue in Dowel: Machine Threaded, Plastic



Article No.	Dia. x Length
039.33.268	10.8 x 11.5mm

Dowel: Nylon Socket for machine thread Econo Bolts

Article No.	Dia. x Length
039.32.050	10 x 12 mm

Glue-in Dowel: Plastic socket for M6 threaded bolt

Article No.	Dia. x Length
039.33.462	8 mm x 11 mm
039.33.266	10 mm x 11 mm

Cover Cap for Minifix 15 housing, for Thickness from 13 to 29mm **Diameter:** 17mm **Material:** Plastic



For wood thickness 16 - 29 mm

Article No.	Colour
262.24.751	White for 16mm - 29mm

Cover cap, Plastic, self-adhesive, Ø 18 mm



Article No.	Colour
245.25.500	Light grey
245.25.310	Beech

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Minifix Connectors

Ordering Information

	Article No.	2 Piece Connector	3 Piece Connector	4 Piece Connector
	**Minifix casing**			
	262.26.070	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.26.532			
	262.26.534			
	262.26.264			
	**Connecting Bolt**			
	262.28.679	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.27.679			
	262.28.624			
	**Dowel**			
	039.32.050		1 no.	as per requirement
	**Cover Cap**			
	262.24.751	—	—	1 no. as per requirement

Ordering Information

	Article No.	2 Piece Connector	3 Piece Connector	4 Piece Connector
	**Minifix casing**			
	262.26.070	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.26.532			
	262.26.534			
	262.26.264			
	**Machine Thread Connecting Bolt**			
	262.28.643	1 no.	1 no.	as per requirement
	262.28.319	1 no.	1 no.	as per requirement
	**Dowel**			
	039.33.268	—	1 no.	as per requirement
	**Cover Cap**			
	262.24.751	—	—	1 no. as per requirement


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Spreading Sleeve

Minifix Spreading sleeve
Strip of Sleeves
For drilled hole ø 5mm
Material: Nylon



Till Stock Last


Article No.	Length
042.98.051	12 mm

Dowel: Made of white birch wood



Article No.	Dia. & Length
267.89.854	8 x 40 mm

Minifix sleeve
M6 glue-in sleeves
For drilled hole ø 10mm
Material: Nylon



Article No.	Length
039.35.064	13 mm

Special Order

Rafix Connectors

Rafix - SE Connecting Bolts steel with special threading (EURO) for **Drilled hole ø 5 mm.Thread length 12mm**
Drive: Cross slot Pz2



Article No.	Finish
263.20.981	Galvanized

Rafix - SE 32: Connector housing
Finish: Plastic




For wood thickness 19mm

Article No.	Colour
263.12.105	Brown

IXCONNET Spreading connector

Ixconnect SC 8/60





One piece cabinet connector for large furniture items used in MDF and chipboard in combination with wooden dowel with recommended thickness from 15-19mm

For concealed applications, only a Ø 6 mm drill hole for securing the connector is visible after installation

Article No.	For Installation with
262.11.117	RTA Connector, Ixconnect SC 8/60, plastic

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Panel Connectors

KEKU - Suspension Fittings Screw Fixing Type
Area of application: For fastening panels to frame structures
Material: Plastic
Colour: Black



EH - Frame components For screw-fixing to substructures installation: With Ø 4mm chipboard screws or VARIANTA Ø 3mm or 5mm special screws



Article No.	For Installation with
262.49.365	Chipboard screws with countersunk head 4.0 mm

Panel component Installation: For screw-fixing to panels with Ø 4mm chipboard screws or VARIANTA Ø 3mm or 5mm special screws



With lip

Article No.	For Installation with
262.49.356	Chipboard screws with countersunk head 4.0 mm

KEKU - Push-in fittings
Area of application: For fastening panels to frame structures **Material:** Plastic
Colour: Black



AS - Frame components For screw-fixing to substructures installation: With Ø 4mm chipboard screws or VARIANTA Ø 3mm or 5mm special screws



Article No.	For Installation with
262.50.368	Chipboard screws with countersunk head 4.0 mm

AS - Panel components installation: With Ø 4mm chipboard screws or VARIANTA Ø 3mm or 5mm special screws



Article No.	For Installation with
262.50.359	Chipboard screws with countersunk head 4.0 mm

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Shelf Supports for Wood

For wooden shelves: Steel
Load capacity: 80 kg/per set of 4 pieces
ø 5mm



Article No.	Finish
282.43.905	Bright Galvanised

Shelf Support: Steel
Load capacity: 80 kg/per set of 4 pieces



Article No.	Finish
282.04.711	Nickel plated
282.04.515	Brass plated
282.04.113	Burnished

Shelf Support: Plastic
For drilled hole ø 5mm
Load carrying capacity 75kg/ per set of 4 pieces



Article No.	Colour
283.63.715	White
283.63.117	Brown

Shelf Support: For wooden shelves

Shelf Support Pin LADY ø 5MM



Shelf Support Pin DUPLO ø 3MM




Article No.	Finish
282.84.910	Zinc Plated
282.84.920	Nickel Plated

Load capacity: 80kg / 4 pcs
For wood ø 5mm pin

K LINE








Article No.	Finish
284.84.711	Nickel Plated

For Glass





Article No.	Finish
284.84.990	Soft Clear Rubber

Special Order


Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Shelf Support for Wood

For wood
Smooth Pin ø 5mm
Load capacity: 80kg / 4 pcs

FLIPPER








Article No.	Finish
263.07.001	Aluminium Plastic
263.07.007	White





Article No.	Finish
263.20.002	Euro Dowel
263.20.004	Plain Dowel

Special Order

For wood
load capacity: 80kg / 4 pcs

UNICO





Article No.	Pin Size
262.37.700	ø 5 smooth pin



Till Stock Last

Article No.	Pin Size
262.37.710	ø 3 smooth pin



Till Stock Last

Article No.	Pin Size
262.37.720	ø 5 euro threaded pin

For panel 25mm thick minimum
Load capacity: 60kg/ 4 pcs
ø 12/16mm

SECRET MAXI





Article No.	Pin Size
284.03.356	Light grey plastic



Article No.	Pin Size
284.03.357	Light grey plastic

Join any shelf and side including top and bottom by rotating in-built minifix by 90° to obtain a click for lock position.
Easy shelf repositioning by reversing the operation.



Panel 18 mm thick

Article No.	Finish
263.67.556	Round body
263.50.155	Side bracket

Panel 25 mm thick

Article No.	Finish
263.67.574	Round body
263.50.173	Side bracket


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Shelving system for floating wooden shelves

Wood Shelf Support
30 to 40 mm thickness
Load Capacity15 kilos
per piece with 300 mm
shelf depth ø 14mm

TRIADE





Article No.	Finish
283.39.010	Zinc Alloy & Steel

Wood Shelf Support
40 mm thickness Load Capacity
20 kilos per piece with
400 mm shelf depth ø 14mm

TRIADE MAXI





Article No.	Pin Size
283.39.012	Zinc Alloy & Steel

Concealed wood shelf support

Height adjustment: +/- 4mm
Lateral adjustment: +/- 4mm
24 to 30 mm thickness



Article No.	Finish
283.39.015	Zinc Alloy & Steel

Bracket for Triade Maxi



Article No.	Pin Size
283.39.021	Bracket Steel Zinc Plated

Bracket for Triade



Article No.	Finish
283.39.019	Bracket Steel Zinc Plated

Pan Head Screw
M5 x 12 mm



Article No.	Finish
013.09.008	Steel zinc-plated

Note: 2 Screws to be ordered for each bracket

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Shelving system for floating glass

Glass Shelf Support
Glass Shelves from
5 upto 10 mm
Load Capacity 6 kilos per piece for 150mm shelf depth

KALABRONE MINI







Note: 2 Pieces to be ordered


Article No.	Finish
284.09.030	Stainless Steel
284.09.230	Bright Chrome
284.09.930	Silver

Special Order

Glass Shelf Support
Glass Shelves from
8 upto 30 mm
Load Capacity 25 kilos per piece with 320 mm shelf depth

KALABRONE SYSTEM







Packing : Set Of 2

Article No.	Finish
284.09.280	Stainless Steel
284.09.080	Bright Chrome
284.09.980	Silver


Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Shelving system for floating glass

For glass 5-6 mm thick
Load capacity: 80kg/ 4 pcs

KRISTAL








Smooth pin ø 5mm

Article No.	Finish
284.04.655	Nickel Plated

Smooth pin ø 5mm for glass 4-8 mm thick
Load capacity: 80kg/ 4 pcs

KUBIC






Article No.	Finish
284.04.641	Nickel Plated

Shelf Support,
Capacity 60 Kg, Zinc Alloy





Article No.	Finish
282.18.706	Nickel Plated

Peki Glass Support 4-10mm
Ø5 Nk-transp.
Load: 80kg / 4 pcs



Article No.	Finish
284.04.611	Nickel Plated

Glass Shelf Support: Zinc alloy with rubber vacuum
Plug-in, with twin grooves
Load capacity: 60kg



Article No.	Finish
282.24.730	Nickel plated

Glass Shelf Support: Steel with Transparent plastic cap
ø 5mm
Load capacity: 60kg



Article No.	Finish
281.41.907	Steel, Galvanized

Dimensional data not binding. We reserve the right to alter specifications without notice.


Special Order

Stock Available

Connecting Screws


M4 Threaded Screw
with combi slot for PZ 2 cross slot or flat blade screwdrivers
Material: Steel nickel plated





Article No.	Length
022.34.157	15 mm
022.34.255	25 mm
022.34.308	30 mm


Sleeve with M4 Internal thread
with combi slot or flat blade screwdrivers
Material: Steel nickel plated



Article No.	L	Wood Thickness
267.01.715	27	28 mm - 36 mm
267.01.717	35	37 mm - 45 mm

Confirmat One-peice connector
with shank ø 7, Head ø 10mm
Thread length 50mm






Article No.	Finish
264.42.190	Steel Galvanised

Made of nickel-plated or black steel, with M6 thread
Connecting screw with sleeve
Drive: Cross slot PZ and longitudinal slot






Article No.	Length
267.05.703	36 mm - 46 mm

Bed Connectors

Bed Connectors: with cranked hook-in part
Material: Steel
Installation: For screw-fixing



For Height: 100 mm

Article No.	Finish
271.03.511	Yellow chromatized
271.03.910	Chromatized

For Height: 130 mm

Article No.	Finish
271.03.531	Yellow chromatized
271.03.930	Chromatized

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Hinges




Technical information for Hinges

Drilling and fixing pattern






Cup for screw fixing: Preferably with countersunk chipboard screws



Mounting plate for screw fixing: Preferably with countersunk chipboard screws or with pre-mounted special screws into 32mm series drilled holes



Drilling Pattern: Metallamat A series follow the drilling pattern of 48 x 6


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Technical information for Hinges

Fixing door to carcase



Metallamat A series hinges are fitted onto the fixed mounting plate by sliding on

Adjustment options



Metallamat A hinges have 3 dimensional adjusting facility



A. Lateral adjustment:
Adjusting distance on concerned hinge + 3mm



B. Height adjustment:
This is done via the mounting plate adjusting distance +/- 3mm



C. Depth adjustment:
Adjusting distance on concerned hinge +4 mm, -1mm


Dimensional data not binding. We reserve the right to alter specifications without notice.

Special Order


Stock Available

Technical information for Hinges


Mounting pattern of hinges




Mounting methods: Generally there are 3 types of mounting



Full overlay methods: Recommended for flush doors




Half overlay mounting: Recommended for rebated doors



Inset overlay mounting

Choice of mounting plate




Example: With door overlay of 10mm and distance to the cup of 3mm, a mounting plate with distance 6mm has to be chosen.

Door overlay mm

7	8	9	**10**	11	12	13	14	15	16	17	18	19	
									3	4	5	6	0
						3	4	5	6				3
			3	4	5	6							**6**
3	4	5	6										9

Distance to cup mm — Mounting plate distance mm

Determination of required minimum gap for half overlay



The required minimum gap depends on the type of hinge, distance to cup and door thickness. After the dimensions of distance to cup and door thickness has been determined, the minimum gap can be looked up in the application table.

Example: With door thickness of 19mm and a distance to cup of 4 mm a minimum gap of 2mm is required

Door thickness mm	Distance to cup mm			
	3	**4**	5	6
16	1.2	1.2	1.1	1.1
18	1.7	1.7	1.6	1.6
19	2.0	**2.0**	1.9	1.9
20	2.4	2.3	2.2	2.2
22	3.3	3.1	3.0	2.9
24	4.5	4.2	4.0	3.9
26– 32	Trial hanging is recommended			


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Technical information for Hinges

Recommendation with regard to the number of concealed hinges to be used per door panel:
The number of concealed hinges per door depend on
a) door width
b) door height
c) door weight (kg) &
d) door material (type of wood used)
Example: 3 concealed hinges have to be mounted on a door panel with a height of 1500 mm and a door weight of 9-12 kg, keeping in mind the door width of 500mm
Should the width increase then the number of hinges to be used will be 4 pieces.

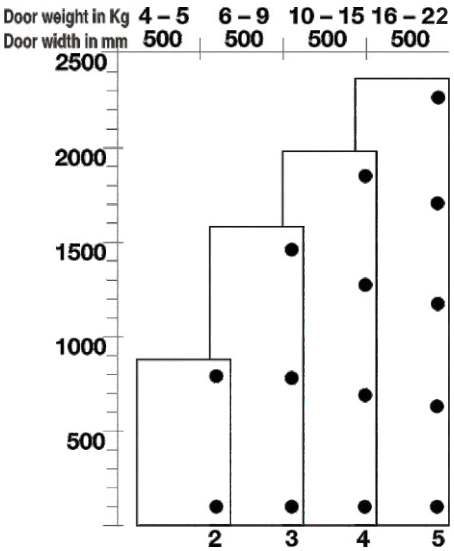

The number of furniture hinges shown in the diagram is just a recommendation though a fitting test is required.

Recommendation for normal furniture hinges like the BUTT and ROLLED hinges per door panel: This depend on
a) door width
b) door height
c) door weight (kg) &
d) door material (type of wood used)
Example: 2 furniture hinges have to be mounted on a door panel with a height of 900 mm and a door width of 600mm considering a thickness of 19mm

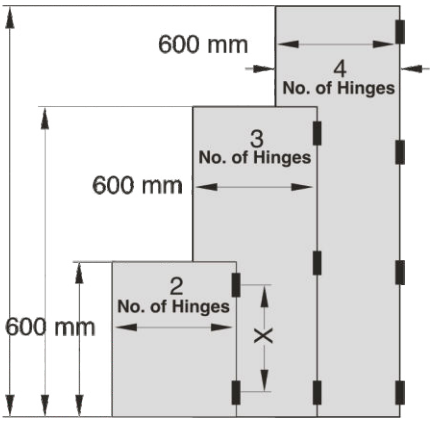

Eg. Two furniture hinges are recommended for a door height of 900mm


The number of furniture hinges shown in the diagram is just a recommendation though a fitting test is required.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Special Order

Stock Available


Metalla Clip-On Hinges (with Soft-Close)




Features:
- Soft Close integrated into hinge arm
- Clip-on Mounting
- Material : Mild Steel
- Finish : Nickel Plated
- Passed 48 hour salt test
- Material certified according to TUV Germany
- Cycle testing - Passed 40,000 cycles
- 3 Dimensional adjustment facility

Technical Information:
- Opening Angle : 110°
- Thickness of Hinge cup : 11.3 mm
- Diameter of Hinge cup : 35 mm
- Door Thickness : 14 - 22 mm

Full overlay mounting






Full overlay, Crank = 0

Article No.	Mounting
315.07.075	Full Overlay Mounting

Half Overlay Mounting






Half overlay, Crank = 7

Article No.	Mounting
315.07.076	Half Overlay Mounting

Inset Mounting





Article No.	Mounting
315.07.077	Inset Mounting

Note:
- Not suitable for undersink application
- Article consists of 2 Hinges+2 Mounting Plates+ 8 Fixing Screws

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Metalla Slide-On Hinges (with Soft-Close)



Product Features:

- Slide-on Mounting
- Material: Mild Steel
- Finish: Nickel Plated
- Passed 48 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 105°
- Thickness of Hinge Arm: 11.3 mm
- Diameter of Hinge cup: 35 mm
- Door Thickness: 14-22 mm
- Drilling Pattern: 48/6 mm

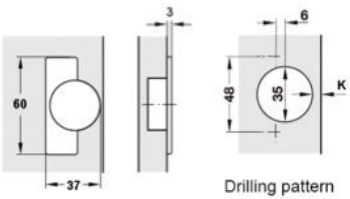

Drilling pattern
48/6

Article No.	Mounting
315.07.042	Full Overlay Mounting
315.07.043	Half Overlay Mounting
315.07.044	Inset Mounting

Note:
- Not suitable for undersink application
- Article Consists of 2 Hinges + 2 Mounting Plates + 8 Screws

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Metalla Clip-On Hinges (with 4 Holes Mounting Plate)




Product Features:

- Mounting Plate with 4 holes for extra stability Clip-on Mounting
- Material: Mild Steel
- Finish: Nickel Plated
- Passed 48 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 110°
- Thickness of Hinge Arm: 11.3 mm
- Door Thickness: 14-22 mm
- Drilling Pattern: A= 48 mm & B = 6 mm

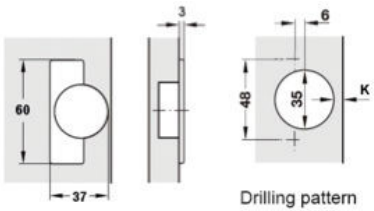

Drilling pattern
48/6



Article No.	Mounting
311.01.146	Full Overlay Mounting
311.01.145	Half Overlay Mounting
311.01.144	Inset Mounting

Note:
- Not suitable for undersink application
- Article Consists of 2 Hinges + 2 Mounting Plates + 12 Screws


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Metalla Slide-On Hinges (with 4 Holes Mounting Plate)

Opening Angle 110°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility
Door thickness: 14-22mm
Finish: Nickel Plate
Material: Mild Steel
Mounting Plate: 4 holes

Cup dimensions




Drilling dimensions for cup fixing screw fixing




Full overlay mounting

110° full overlay hinges with (4 holes) 0 mm mounting plate



Mounting plate distance




Article No.	Mounting
311.01.121	Full Overlay Mounting

Half overlay mounting

110° half overlay hinges with (4 holes) 0 mm mounting plate



Mounting plate distance




Article No.	Mounting
311.01.122	Half Overlay Mounting

Inset mounting

110° Inset hinges with (4 holes) 0 mm mounting plate



Mounting plate distance



Article No.	Mounting
311.01.123	Inset Mounting

Note:
- Not suitable for undersink application
- BOM article Consist of 2 Hinges + 2 Mounting Plates
- We dont provide screws with these Articles, (Please use Nickel Plated Screws to avoid rusting)

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Eco Metalla Hinge



Slide-on Mounting
Material: Mild Steel
Finish: Nickel Plated
Passed 24 Hours Salt Spray Test
Cycle Testing: Passed 20,000 Cycles
3-Dimensional Adjustment
Opening Angle: 110°
Thickness of Hinge Arm: 11.3 mm
Diameter of Hinge cup: 35 mm
Door Thickness: 14-22 mm
4 hole mounting plate

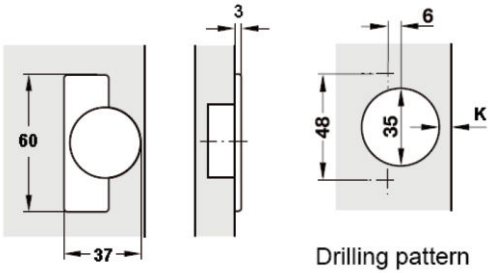

Drilling pattern
48/6

Finish: SS Polished

Article No.	Overlay
483.01.745	Full Overlay Mounting
483.01.746	Half Overlay Mounting
483.01.747	Inset Mounting

Note:
- Not suitable for undersink application
- Article consists of 2 Hinges+2 Mounting Plates+ 12 Fixing Screws


Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Metalla Thick Door Hinges (with Soft-Close) - Clip-On





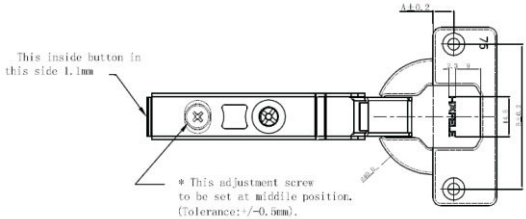

Specifications:

- Material: Mild Steel
- Finish: Nickel Plated
- Anti Corrosion testing: Cleared 48 hours of salt testing
- Material Certification: TUV Certified
- Cycle Testing: Passed 40,000 Cycle test
- Opening Angle 95°
- Hinge Boss/Cup Depth: 13.5mm
- Diameter of Hinge Cup 40 mm
- Door Thickness 18-30 mm
- Drilling Pattern 52/7.5 mm

Finish: SS Polished

Article No.	Overlay
315.07.072	Full Overlay Mounting, 30mm door thickness
315.07.073	Half Overlay Mounting, 30mm door thickness
315.07.074	Inset Mounting, 25 mm door thickness

Note:

- Not suitable for undersink application
- 1 set Consist of 2 Hinges +2 Mounting Plates +8 Fixing Screws +2 Hinge Cup Caps +2 Hinge Arm Cap

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Metalla SS304 Hinges (with Soft-Close) - Clip-On



Soft Close Integrated into Hinge arm
- Clip-on Mounting
- Material: Stainless Steel 304 (body)
- Finish: SS Polished
- Passed 96 Hours Salt Spray Test
- Cycle Testing: Passed 80,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 98°
- Thickness of Hinge Arm: 11.3 mm
- Diameter of Hinge cup: 35 mm
- Door Thickness: 14-30 mm
- Drilling pattern: 48/6 mm


Product Application:
- Kitchen Under Sink Cabinets
- Coastal Areas

Finish: SS Polished


Article No.	Overlay
311.01.652	Full Overlay Mounting
311.01.653	Half Overlay Mounting
311.01.654	Inset Mounting



3 Dimensional Adjustment



Side adjustment: -3mm



Height adjustment: +/-2mm



Depth adjustment: +3/-1mm


Note:
- Article Consists of 2 Hinges + 2 Mounting Plates + 12 Screws


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Metalla Pie Cut Hinges - Clip-On

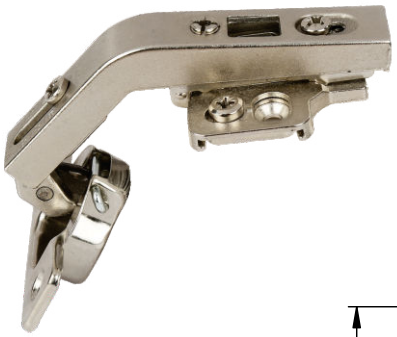

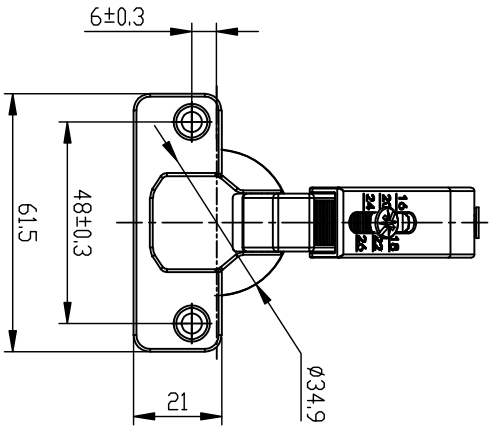


Specification:
Material: Cup-Mild Steel, Hinge Arm & Mounting Plate- Zinc Alloy
Finish: Nickel Plated
Drilling pattern: 48/6 mm
Hinge cup dia: 35 mm
Drilling depth for cup: 11 mm
Door thickness: 14-24 mm
Opening angle: 135°
Partial opening angle: 65°
Full opening angle: 135°

Finish: SS Polished

Article No.	Overlay
311.66.542	PIE CUT CORNER HINGE 135 DEGREE 48/6 MM

Metalla Wide Angle Hinges (with Soft-Close) - Clip-On
Opening Angle: 165°
Drilling Pattern: 48/6 mm
Material: MS
Finish: Nickel Plated



Article No.	Mounting
315.07.012	Full Overlay Mounting

Note:
- Not suitable for undersink application
- 2 Hinges +2 Mounting Plate +8 Screws
- Pie Cut hinge is compatible with wide angle hinges.

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Metallamat A Concealed Hinges

Opening angle 92°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility. Door thickness: 24 to 35mm

Cup Dimension




Drilling dimensions for cup fixing Screw Fixing



Full overlay mounting Opening angle 92°






Article No.	Mounting
316.31.500	Full Overlay Mounting

Haif overlay mounting Opening angle 92°






Article No.	Mounting
316.31.501	Half Overlay Mounting

Inset mounting Opening angle 92°





Article No.	Mounting
316.31.502	Inset Mounting

Mounting plates for Metallamat Hinges: Screw fixing with chip board screws



Article No.	Thickness
316.51.502	2 mm

Ordering Information:

BOM Article No:	Mounting
316.31.510	Full Overlay Mounting
316.31.511	Half Overlay Mounting
316.31.512	Inset Mounting

Note:

- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately
- Metallamat A hinge 1 + 1 Mounting Plate 2mm

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

DUOMATIC Concealed Hinges Thickness up to 40 mm


DUOMATIC Concealed hinge
For profile doors up to 40mm
Opening angle 94°




Minimum distance between door and side panel

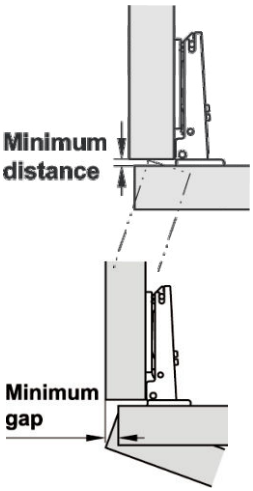

Drilling pattern for cup fixing for screw fixing




Full overlay mounting

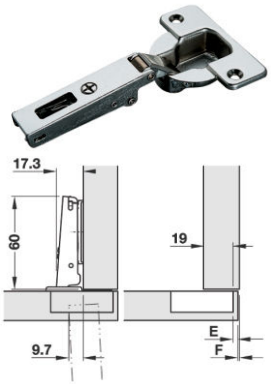


Article No.	Mounting
329.05.605	Full Overlay Mounting

Half overlay mounting

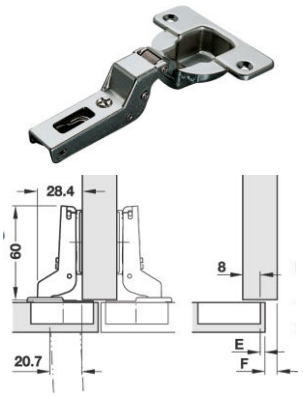

Article No.	Mounting
329.05.614	Half Overlay Mounting

Inset mounting

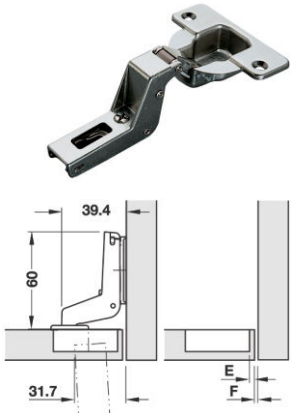

Article No.	Mounting
329.05.632	Inset Mounting

DUOMATIC Cruciform
mounting plates
screw fixing with chipboard
screws



Article No.	Thickness
329.73.502	2 mm

Ordering Information:

BOM Article No:	Mounting
329.05.609	Full Overlay Mounting
329.05.619	Half Overlay Mounting
329.05.634	Inset Mounting

Note:
- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately
- Duomatic Hinge 1 + 1 Mounting Plate 2 mm


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Hinge

Easy Mont Hinge: Screw-mounted
Side panel thickness from 16 to 22 mm
Opening angle 90°
Shutter Thickness from 16mm



Material: Mild Steel



Article No.	Finish
343.33.970	Galvanized

Special Order

Kubikina Hinge






Chrome plated matt / Grey

Area of application: For overlay or inset mounting
Opening angle: 180°
Material: Zinc alloy/plastic
Installation: For screw fixing
Adjustment facility: Height ± 1.5 mm, side ± 1 mm, depth ± 1.5 mm (with overlay mounting), height ± 1.5 mm, side ± 1.5 mm, depth ± 1 mm (with inset mounting)


3-dimensionally adjustable for shutter alignment with millimetre accuracy

Article No.	Finish
341.24.435	Chrome plated matt/ Grey

Drilling pattern




Number of hinges per door



With wood thickness 18 mm: A = 9 mm
With wood thickness >20 mm: A = 10 mm

Dimensions



Sample measurements for 20 mm thick wood
Hinge distance min. 500 mm
Door width up to 600 mm
The door's width must not exceed its height

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Flap Fittings and Lid Stays



Technical Information for DUO & DUO Forte




Duo – The fitting with dual function

For flaps made of wood, glass or with aluminium frame


- Adjusting the arms (overshear) turns the lid stay into a flap stay.
- Less space required inside the cabinet
- Wear-resistant friction coupling with large adjusting range

Application

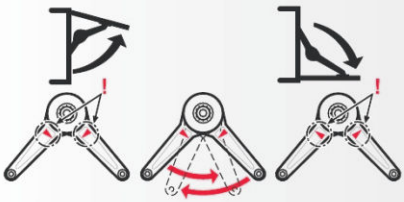

as lid stay — as flap stay

Front adjustment facility



Height adjustment* | Side adjustment* | Tilting angle adjustment* | Holding power adjustment

* depends on the hinges that are installed

Holding power adjustment with SW4 Allen key
(Cat. No. 008.28.241)




Stronger holding power
= **locking** function
= flap locks in any position (multi-position stop)

Weaker holding power
= **braking** function
= lid stay closes softly/flap stay opens gently

Surfaces
Black, nickel-coloured or white




Lateral space requirement/ side distance (S) for screw-on bracket




S = 12 + door overlay

Minimum installation depth



Duo standard



Duo forte

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

DUO

Lid Stays - Duo
With adjustable braking effect



Area of application: For wooden flaps and flaps with aluminium frame, also suitable as flap stays
For flaps with aluminium frame: width 20 mm or 45 mm
Opening angle: 75°, 90° or 110°
Version: With self-closing function
Mounting: For left and right hand use
Flap Height: upto 500mm
Weight: 2 to 15kg



Light version **HUWIL**

Article No.	Area of application
373.66.211	For flaps made of wood or with aluminium frame. Frame width 45 mm and above **Finish: Black**
373.66.611	For flaps made of wood or with aluminium frame. Frame width 45 mm and above **Finish: Nickel Plated**
373.66.261	For flaps made of wood or with aluminium frame. Frame width 45 mm and above **Finish: White**
373.66.621	For flaps with aluminium frame with frame width 20 mm **Finish: Nickel Plated**

Special Order

DUO Forte

Flap Stays / Duo Forte





- **Opening angle:** 75°, 90° or 110° (with different opening angles of hinges)
- **Mounting:** For left and right hand use
- The Flap locks in any position and it stops in end position when released by slight pressure
- Can be mounted on wooden door flaps and for door flaps with aluminum frame
- Gentle push helps in opening and closing of the Flap/Cabinet Door
- Made of Zinc alloy and the mounting bracket are made of steel
- Flap weight bearing capacity is from 3kg - 15kg

Flap Height: upto 700mm

Area of application: Also suitable for use as flap stays. Opening angle: 75°, 90° or 110°
Material: Stay: Zinc alloy
Mounting bracket: Steel
Finish: Black, Nickel plated & White
Version: With self mounting: For left and right hand use
Installation: Without tools (clip mounting system)
Distance from edge: 28 mm
Lock Function:
Locking: Flap locks in any position
Breaking function: Flap locks in end position, release by slight pressure

Article No.	Area of application
373.66.311	DUO Forte Flap Stay, **Black**, For Wood/ED = 28mm
373.66.631	DUO Forte Flap Stay, **Nickel Plated**, For Wood/ED = 28mm
373.66.371	DUO Forte Flap Stay, **White**, For Wood/ED = 28mm
373.66.641	DUO Forte Flap Stay, **Nickel Plated**, For Aluminium/ED = 28mm

Adapter: A must for all aluminium frame applications. (To be ordered separately)



Article No.	Finish
563.25.960	Nickel plated


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

DUO Installation


Installation as lid stay

Opening angle 75°




Cabinet height mm	Flap weight kg Locking function 1 fitting	Locking function 2 fittings	Braking function 1 fitting	Braking function 2 fittings
250	7.0	15.0	9.0	15.0
300	6.0	12.0	7.5	15.0
350	5.0	10.0	6.5	13.0
400	4.5	9.0	6.0	11.5
450	4.0	8.0	5.0	10.0
500	3.5	7.0	4.5	9.0

Opening angle 90°




Cabinet height mm	Flap weight kg Locking function 1 fitting	Locking function 2 fittings	Braking function 1 fitting	Braking function 2 fittings
250	6.0	12.0	7.5	15.0
300	5.0	10.0	6.5	13.0
350	4.5	8.5	5.5	11.0
400	4.0	7.0	5.0	10.0
450	3.5	6.5	4.5	8.5
500	3.0	6.0	4.0	7.5

Opening angle 110°




Cabinet height mm	Flap weight kg Locking function 1 fitting	Locking function 2 fittings	Braking function 1 fitting	Braking function 2 fittings
200	6.0	12.0	8.0	15.0
250	5.0	9.5	6.0	12.0
300	4.0	8.0	5.0	10.0
350	3.5	7.0	4.0	9.0
400	3.0	6.0	4.0	7.5
450	2.5	5.5	3.5	7.0
500	2.0	5.0	3.0	6.0

Installation as flap stay (use 2 fittings)



Separate catch required



Separate catch is not required.
Application possible from a cabinet height of 300 mm (internal height min. 255 mm).
Space requirement for fitting inside the cabinet when the flap is being closed:
130 mm from front edge of cabinet

Cabinet height mm	Flap weight kg Locking function 2 fittings	Braking function 2 fittings
200	15.0	15.0
250	12.0	15.0
300	10.0	13.0
350	8.5	11.0
400	7.0	10.0

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

DUO Forte Installation


Installation as lid stay

Opening angle 75°




Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
300	9.0	15.0	12.0	15.0
350	8.0	15.0	11.0	15.0
400	7.0	14.0	9.0	15.0
450	6.0	12.5	8.0	15.0
500	5.5	11.0	7.0	15.0
550	5.0	10.0	6.5	13.0
600	5.0	9.5	6.0	12.0
650	4.0	8.5	5.5	11.0
700	4.0	8.0	5.0	10.5

Opening angle 90°



Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
300	7.5	15.0	9.0	15.0
350	6.5	13.5	8.0	15.0
400	6.0	12.0	7.5	15.0
450	5.5	11.0	7.0	14.0
500	5.0	9.5	6.0	12.0
550	4.5	8.5	5.5	11.0
600	4.0	8.0	5.0	10.0
650	3.5	7.0	5.0	9.5
700	3.0	7.0	4.0	9.0

Opening angle 110°



Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
250	7.5	15.0	10.0	15.0
300	6.5	12.5	8.0	15.0
350	5.5	11.0	7.0	14.0
400	4.5	9.5	6.0	12.5
450	4.0	8.5	5.5	11.0
500	4.0	7.5	5.0	10.0
550	3.5	7.0	4.0	9.0
600	3.0	6.0	4.0	8.0
650	3.0	5.5	4.0	7.5
700	3.0	5.0	3.5	7.0

Dimensional data not binding. We reserve the right to alter specifications without notice.

Special Order

Stock Available

GAS SPRING (Upward Opening)



Specifications:
- Application: For Wood & Aluminum Framed Shutters
- Material: Steel with Powder Coating
- Finish: Silver
- Center to Center: 245±2 mm
- Piston Capacity: 60,80,100,120,150 N
- Weight Capacity: Refer Chart
- Usage: For Lid Stay (upward opening)
- Max Panel Height: 600 mm
- Max Width: 900 mm

Weight for 1 pair of gas springs

Max. lid weight (kg) with 75° application				
Spring Force	Lid Height in mm			
N	300	400	500	600
60	4	3	2.4	2
80	5.4	4	3.2	2.8
100	6.8	5.2	4	3.4
120	8.2	6.2	5	4
150	9.4	7	5.8	4.8
Max. lid weight (kg) with 90° application				
Spring Force	Lid Height in mm			
N	300	400	500	600
60	3.6	2.6	2.2	1.8
80	4.8	3.6	2.8	2.4
100	6	4.4	3.6	3
120	7.2	5.4	4.2	3.6
150	8.2	6.4	4.6	4.2
Max. lid weight (kg) with 110° application				
Spring Force	Lid Height in mm			
N	300	400	500	600
60	3.2	2.4	1.8	1.6
80	4.2	3.2	2.4	2
100	5.2	3.8	3.2	2.6
120	6.2	4.6	3.8	3.2
150	7	5.2	4.4	3.8



Mounting Plate for wooden shutters




Mounting Plate for carcase



Mounting Plate for aluminum frame shutters

All mounting plates included in the packet

Article No.	Power of Gas Spring
483.98.060	60N equivalent to 6 kg
483.98.061	80N equivalent to 8 kg
483.98.062	100N equivalent to 10 kg
483.98.063	120N equivalent to 12 kg
483.98.064	150N equivalent to 15 kg



Mounting dimensions when using hinges for full overlay mounting

Opening Angle	Dimensions (mm)		
	A	B	C
75°	260	80	25
90°	238	80	25
110°	215	70	25


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Gas Spring (Upward Opening)



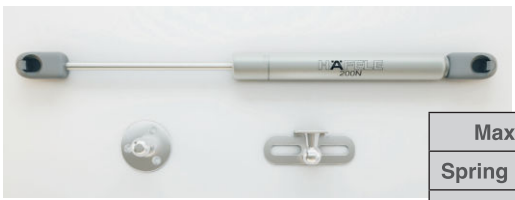

Specifications:
Material: Steel with Powder Coating
Finish: Silver
Center to Center: 254±2 mm
Capacity: 200 & 250 N

Opening Angle	Dim. mm		
	A	B	C
75°	249	82	15
90°	226	60	15
110°	269	102	15

Weight for 1 pair of gas spring


Max. lid weight (kg) with 75° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	700
200	16.2	12	10	8.4	7.6
250	21	15.8	13	10.8	10
Max. lid weight (kg) with 90° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	700
200	16.2	11	8	7.2	6.2
250	21	14.4	20.4	9.4	8
Max. lid weight (kg) with 110° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	700
200	12	9	7.6	6.6	6
250	15.8	11.8	10	8.6	7.6

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Gas Spring (Upward Opening)

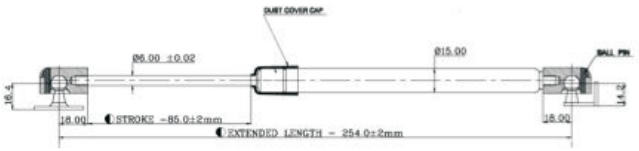

Article No.	Description
373.83.010	Pair of Gas Spring Upward Opening C/C 254mm 200 N
373.83.011	Pair of Gas Spring Upward Opening C/C 254mm 250 N

Gas Spring (Downward Opening)

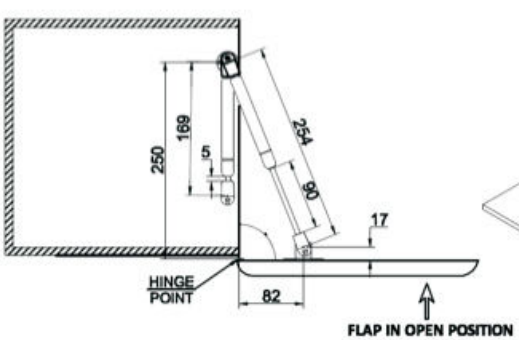



Specifications:
Material: Steel with Powder Coating
Finish: Silver
Center to Center: 245±2 mm
Capacity: 0 N

Article No.	Description
373.83.012	Pair of Gas Spring Downward Opening C/C 245 m

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

One Touch Mechanism
With Built-in Push-to-open And Soft Close

New



Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

One Touch Mechanism
With Built-in Push-to-open And Soft Close





Article No.	Description
315.11.420	One Touch Mechanism V 1.5 Light (Upto 7.5 kg)
315.11.421	One Touch Mechanism V 1.5 Heavy (Upto 20 kg)

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

HÄFELE

Furniture Locks and Locking System




Multipurpose lock


Multi Purpose Lock

Finish : Chrome Polished
Installation : Screw Fixing
Material : Zinc Alloy
Supplied with: Two Plastic sleeve Metal Keys
Key Combination: 120






For 22 mm shutter thickness



For 32 mm shutter thickness



Article No.	Thickness for Door
232.01.320	22mm
232.01.321	32mm

Special Order

Multipurpose lock for Drawers

Finish: Silver
Key - Brass
Supplied with: 11 pin brass dimple key
Suitable for: 20,25 and 30mm drawer panel
Key Combination: 1,00,000



Article No.	Thickness for drawer
223.64.001	20 mm
223.64.002	25 mm
223.64.003	30 mm

Multipurpose lock for Wardrobe

Finish: SS Matt
Material: Lock Body - SS
Key - Brass
Supplied with: 11 pin brass dimple key
Suitable for: 25,30 and 35mm door panel
Key Combination: 1,00,000




Article No.	Thickness for door
223.64.012	25 mm
223.64.013	30 mm
223.64.014	35 mm

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Multipurpose Lock

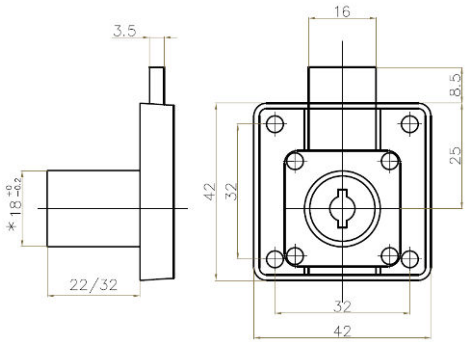





Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Size: 22 & 32 mm
- Key Combination: 960
- Master Key: Yes



Master Key

Article No.	Description
232.38.922	Multipurpose Lock 22 Mm Nickel Plated, 960 Key Combination
232.38.921	Multipurpose Lock 32 Mm Nickel Plated, 960 Key Combination
209.99.900	Master Key, Brass

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Pedestal Lock






Master Key



Article No.	Description
234.99.961	Pedestal Front Lock D19x20 Mm Nickel Plated, 960 Key Combination
209.99.900	Master Key, Brass

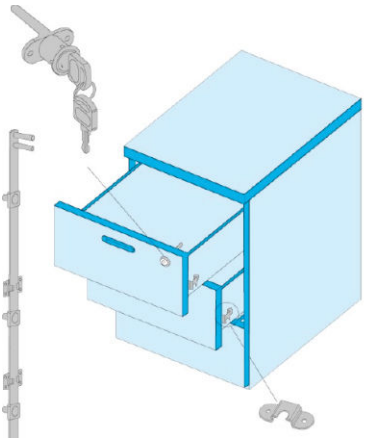



Product Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Key Combination: 960
- Master Key: Yes

Article Consists of:

- Lock body
- Brass keys (2 nos)
- Central locking rod (Aluminum bar) 600 mm
- Finish: Nickle Plated
- Rosette
- Bar guide (2 nos)
- Arresting pin (3 nos)

Special Order


Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Espagnolette Lock





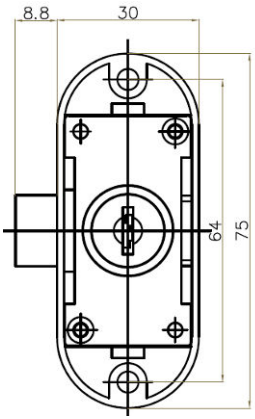

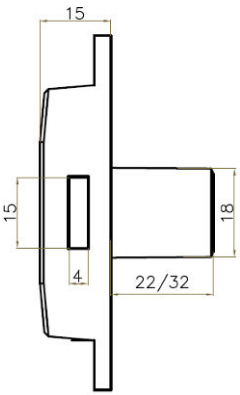





Master Key

Product Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Sizes: 22 & 32 mm
- Key Combination: 960 numbers
- Master Key: Yes
- Backset: 15 mm
- Rod: Need to order separately (2 Pcs per Lock)

Article Consists of:

- Lock body
- Brass keys (2 nos)
- Lock bolt (2 nos)
- Lock hook (2 nos)
- Bar guide big (2 nos)
- Bar guide small (2 nos)
- Strike plate
- Rosette

Note: Locking rod needs to be order separately (available for 1.5 m length)


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Espagnolette Lock



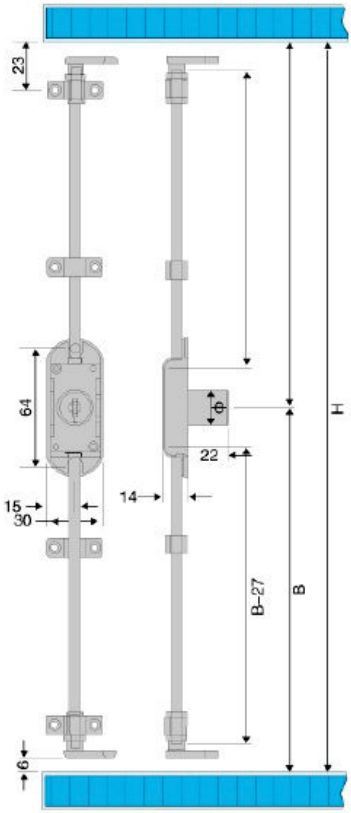

Calculation for Rod Cutting:
H: Internal height of cabinet
(should not exceed 3050 mm)
B: Center of Cabinet
Rod length: B-27 mm

E.G
Internal Cabinet height: 2700 mm (H)
Center of Cabinet: 1350 mm (B)
Rod length at each side:
1350-27 = 1323 mm


Article No.	Description
225.65.620	Espagnolette Lock 22 Mm Nicke Plated
225.65.621	Espagnolette Lock 32 Mm Nicke Plated
225.65.629	Rod For Espagnolette Lock 1.5 Meter Nickel Plated
209.99.900	Master Key, Brass

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Sliding Door Lock

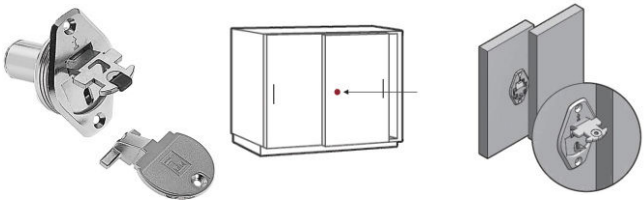

Kit Comprises of:



Article No.	Description
232.20.206	Sliding lock for 2 Door Sliding Fitting
232.20.712	Anti-Levering Device
232.20.207	Sliding lock for 3 Door Sliding Fitting

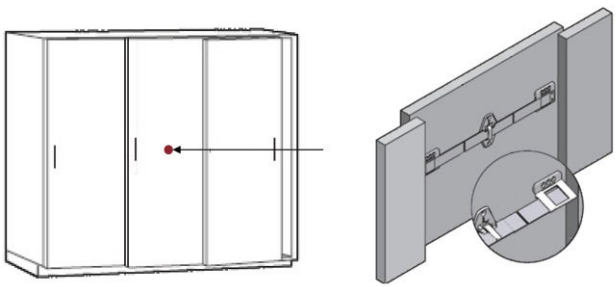

Kit Comprises of:



Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Catches

Automatic door catch, zinc



Article No.	Finish
245.58.754	Nickel plated

Magnetic Catch
For a panel weight of 4-5 kg.
Version: Movable housing
Supplied with counter piece



Article No.	Colour
246.29.105	Brown
246.29.301	Black
246.29.703	White

Magnetic double catch
For a panel weight of 6-8 kg.
Version: Movable housing
Supplied with counter piece



Article No.	Colour
246.84.713	White

Special Order

MINI LATCH Spring catch



Article No.	Finish
245.54.701	Nickel plated

Roller Catch Screw On,
Nylon, Plastic Catch & Stop



Article No.	Finish
243.15.704	Plastic White

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Table Fittings and Counter Top Extension



Axis Linear Counter Top Extension







Material: Mild Steel
Finish: Zinc Plated
Mechanism: Extendable Slides
Dimensions: 600/ 900/ 1200 mm (Depth)
Weight Carrying Capacity: 120 kg
Movement: Linear (Horizontal, Vertical and Diagonal)

Other Details:
Invisible Mechanism
Extra Extendable Slides Available for Countertops with Widths Greater than 1500 mm
Manufactured and Tested in Italy

Article Number:

	Article No.	Countertop Extension Depth (mm) [Refer to Note]	Length of Extension Protrusion (mm) [Refer to Note]
Extending Slides	505.79.901	600	390
	505.79.902	900	590
	505.79.903	1200	790
Central Extendable Slides (For countertop extensions with widths more than 1500 mm)	505.79.911	600	390
	505.79.912	900	590
	505.79.913	1200	790

5 YEARS Warranty
w.r.t. function and use as per Häfele warranty document

Note: Countertop Extension Depth is the dimension along which Axis Linear moves (as shown by the arrow in the images) Extension Length is the value by which the Axis Linear Countertop Extension extends outside your surface / countertop You can have an Axis Linear Countertop Extension of width more than 1500 mm by installing by extra extendable slide*.

Note: *Please refer to the product communication for more information


Special Order


Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

LUNCH Pull-out Drawer Table









Material: Aluminium
Finish: Stainless Steel
Mechanism: Pull-out Extendable Slides
Max. Weight Carrying Capacity: 60 Kg
Dimensions: 450-900 (W) mm
Number of Planes:2
Cycle Testing: 40,000 Cycles

Other Details:
One Article for Variable Widths
Smooth and Silent Functionality
Locking Feature is Available
Manufactured and Tested in Italy

Article No.	505.75.925

5 YEARS Warranty
w.r.t. function and use as per Häfele warranty document

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

EVOLUTION NAKED XL Pull Out Table With Bridge Leg







Material: Aluminium
Finish: Stainless Steel
Mechanism: Pull-out Extendable Slides
Max. Weight Carrying Capacity: 100 kg
Dimensions: 900 (W) mm
Number of Planes: 3

Other Details :
Smooth and Silent Functionality
Cabinet Application, Comes with Legs
Locking Feature is Available
Manufactured and Tested in Italy

Article No.	505.75.995

Till Stock Last

5 YEARS Warranty
w.r.t. function and use as per Häfele warranty document

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

OPLA TOP Pull-out Worktop Flush With Surface




Material: Aluminium
Finish: Stainless Steel
Mechanism: Pull-out Flush Top Extendable Slides
Max. Weight Carrying Capacity: 40 Kg
Dimensions: 450-900 (W) mm
Number of Planes:1
Cycle Testing: 35,000 Cycle


5 YEARS Warranty
w.r.t. function and use as per Häfele warranty document

Other Details:
One Article for Variable Widths
Smooth and Silent Functionality
Manufactured and Tested in Italy


Functioning Steps



Closed



Panel pulled out



Panel adjusts to the same height as the counter

Article No.	505.75.945

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Bedroom Fittings and Accessories



Bed Storage Fittings

Scissor jacks: For application in slatted frames, couches and French beds for adjustable head and foot section.
Material: Steel



18 setting positions
Raising Height Max.300 mm



Article No.	Finish
274.00.833	Yellow chromatized Old Article 274.00.933


Mattress supports

Wooden slats: For manufacture & assembly of single beds frames for mattress
Material: Beech wood
Finish: Lacquered natural wood
Version: Rounded edges

For Single Beds, 5 Layers



Article No.	Length
271.63.006	991 mm



Slat supports, Screw fitting



Slat supports, Press fitting

Accessories for single bed Slat supports
Flexible, screw fixing
Material: Plastic



Article No.	Finish
271.62.116	Brown

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

ORBIT : Folding And Swivel Bed Fitting



Carcass should be securely fixed to the wall before starting the installation of hardware.





Material: Bed Fittings – Mild Steel; Slats – Beech Wood
Finish: Epoxy Dust
Mechanism: Vertical Folding and Swivel with Amortized Pistons
Dimensions of Slatted Frame: 1630 (W) × 2020 (L) mm

Max. Weight Carrying Capacity:
Bed in the Open Position: 200 Kg (Evenly Distributed)
Swivel Cabinet Furniture: 100 Kg
Objects Placed on the Cabinet: 30 Kg

Mattress Thickness & Weight: 150-200 mm; 35-40 Kg
Height Adjustment (Syncronised Legs) : 23 mm
Piston Force: 1600 N
Rotation: 180°; Half Rotation
Cycle Testing: 3,000 Cycles

Other Details:
Integrated Soft Opening Mechanism
Automatic Functioning and Positioning of the adjustable and Syncronised Legs while Opening
Manufactured and Tested in Italy

Article No.	271.95.277

Note:
* Cabinet Carcass and Mattress are not included in the Bed Fitting Set
* Please make sure that you have a strong flooring that is properly leveled with no uneven tile joints for smooth functioning of the product

Special Order


Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

SUPERNOVA : Push-to-open Hide-away Bed Fitting




Carcass should be securely fixed to the wall before starting the installation of hardware. Use Mattress before manual operation





Click Clack Push-to-open Mechanism





Material: Bed Fittings – Mild Steel; Slats – Beech Wood
Finish: Epoxy Dust
Mechanism: Push-to-open, Vertical Folding with Amortized Pistons
Max. Weight Carrying Capacity: 200 Kg (In the Open Bed Position)

Dimensions of Slatted Frame: 1830 (W) × 2020 (L) mm
Mattress Thickness & Weight: 150 - 250 mm; 20 - 25 Kg
Height Adjustment (Syncronised Legs) : 23 mm
Piston Force: 1800 N

Cycle Testing: 10,000 Cycles
Other Details:
Integrated Soft Opening Mechanism
Automatic Functioning and Positioning of the Frontal
Syncronised and Adjustable Legs while Opening
Manufactured and Tested in Italy

Article No.	271.95.279

Note: Cabinet Carcass and Mattress are not included in the Bed Fitting Set

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

GRAVITY: Storage Bed Fitting



Before starting installation of product, securely connect angular brackets to the sides of carcass (not included in the kit)

Material: Bed Fittings – Mild Steel; Slats – Beech Wood
Finish: Epoxy Dust
Mechanism: Bed Lift Mechanism with a Foot Operated Lever that Controls the Opening of the Storage Unit
Dimensions of Slatted Frame:1800 (W) × 2000 (L) mm

Weight Carrying Capacity: 200 Kg (Evenly Distributed)
Mattress Thickness & Weight: 150 - 250 mm; 40 - 45 Kg
Piston Force: 1800 N

Other Details:
Sleek, Superfluous Bed Mechanism with Hidden Pistons to Provide an Obstruction-free Storage Space
Integrated Soft Opening Mechanism
Manufactured and Tested in Italy



Article No.	271.95.278

Note: cabinet carcass and mattress are not included in the bed fitting set

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


ALADINO: Hide-away Bed Fitting (single)



Material: Bed Fittings – Mild Steel; Slats – Rubber Wood
Finish: Silver Grey Powder Coated – RAL 9006
Mechanism: Vertical Folding with 4 Gas Pumps
Dimensions of Slatted Frame: 920 (W) × 2000 (L) mm

Mattress Thickness & Weight: 150 - 200 mm; 12-15 Kg
Weight Carrying Capacity:
Slatted Frame Gas Pump (2 Nos.): 100 Kg Each
Footboard Gas Pumps (2 Nos.): 10 Kg Each
Cycle Testing: 50,000 Cycles

Other Details :
Integrated soft opening mechanism
Automatic functioning and positioning of the footboard while opening
Manufactured and tested in Italy

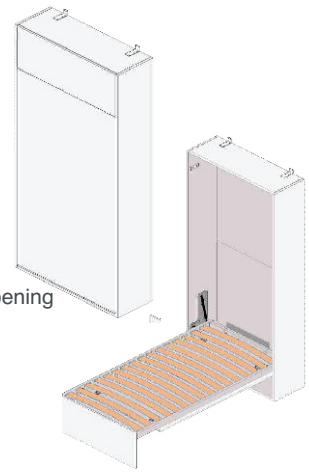

Article No.	271.95.276

Note: Cabinet Carcass and Mattress are not included in the Bed Fitting Set

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

ALADINO: Hide-away Bed Fitting (double)




Carcass should be securely fixed to the wall before starting the installation of hardware.

Material: Bed Fittings – Mild Steel; Slats – Rubber Wood
Finish: Silver Grey Powder Coated – RAL 9006
Mechanism: Vertical Folding with 4 Gas Pumps
Dimensions of Slatted Frame: 1620 (W) × 2000 (L) mm
Mattress Thickness & Weight: 150 - 250 mm; 20 - 25 Kg

Weight Carrying Capacity:
Slatted Frame Gas Pump (2 Nos.): 180 Kg Each
Footboard Gas Pumps (2 Nos.): 10 Kg Each

Cycle Testing: 50,000 Cycles

Other Details :
Integrated Soft Opening Mechanism
Automatic Functioning and Positioning of the Footboard while Open
Manufactured and Tested in Italy

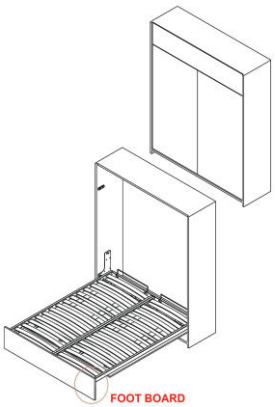

Article No.	271.95.285



Note: Cabinet carcass and mattress are not included in the bed fitting set

Special Order


Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.


Mechanism for ALADINO hide-away bed sofa fitting











Material: Bed Fittings – Mild Steel; Slats – Rubber Wood
Finish: Silver Grey Powder Coated – RAL 9006
Mechanism: Vertical Folding with 4 Gas Pumps
Dimensions of Slatted Frame: 1620 (W) × 2000 (L) mm
Mattress Thickness & Weight: 150 - 250 mm; 20 - 25 Kg

Weight Carrying Capacity:
Slatted Frame Gas Pump (2 Nos.): 180 Kg Each
Footboard Gas Pumps (2 Nos.): 10 Kg Each

Cycle Testing: 50,000 Cycles

Article No.	272.00.110	Sofa mechanism for Aladino 1620mm along with Hardware packet sofa fixing

Other Details :
Integrated Soft Opening Mechanism
Automatic Functioning and Positioning of the Footboard while Opening
Manufactured and Tested in Italy

Note: Cabinet carcass and mattress are not included in the bed fitting set

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

ALADINO ELEKTRA Optimize Space, Effortlessly





BEDDING AND SOFA BOX DIMENSIONS

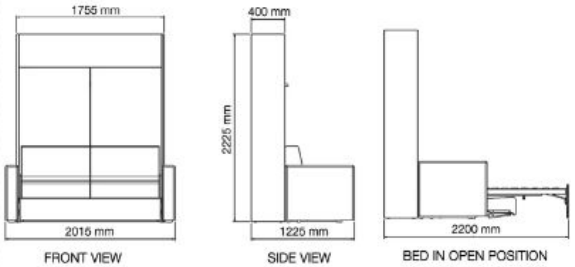

Material: Bed fittings: Mild Steel
Slats: Beech wood
Finish: Silver grey powder coated (RAL 9006)
Components: Motor (x1), main frame gas pumps (x2), footboard gas pumps (x2), wired remote (x1), wireless remote sensor (x1), wireless remote (x1), slatted frame (x1), bed fitting mechanism (x1), cover caps (1 pair)
Dimensions of slatted frame: 1620 mm (W) x 2000 mm (L)
Mattress dimensions: 1600 mm (W) x 2000 mm (L) x 200 mm (H)
Mattress thickness & weight: 23 - 33 kg
Weight carrying capacity:
Slatted frame gas pump (2 Nos.): 1600N each
Foot-board gas pump (2 Nos.): 50N each
Electrical specifications:
Input voltage: 240VAC, 50/60 Hz, 4.2A
Bed opening / closing speed: 18 mm/s
Bed opening / closing indication alarm: 1 beep per second
Wireless remote operating distance from sensor: Max. 610 mm

Article No.	Details
271.95.390	Aladino Elektra Complete Kit
272.00.110	Collapsible Sofa Set (optional)

Note: Cabinet carcass and mattress are not included in the bed fitting set

Special Order

Stock Available

PRATIK: storage bed fitting









Material: bed fittings – mild steel; slats – beech wood
Finish: silver grey powder coated – RAL 9006
Mechanism: bed lift mechanism with horizontal elevation and complete opening
Dimensions of slatted frame: 1800 (w) × 2000 (l) mm
Weight carrying capacity: 200 kg (evenly distributed)
Mattress thickness & weight: 150 - 250 mm; 20 - 25 kg

Other details:
Integrated soft opening mechanism
Manufactured and tested in Italy



Bed Fitting

Article No.	Size
274.52.915	1800X2000 MM

Slatted Frames

Article No.	Size
271.00.018	1800X2000 MM

Note: Cabinet carcass and mattress are not included in the bed fitting set

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.


Mini Lift





Mini-Lift mounting bracket



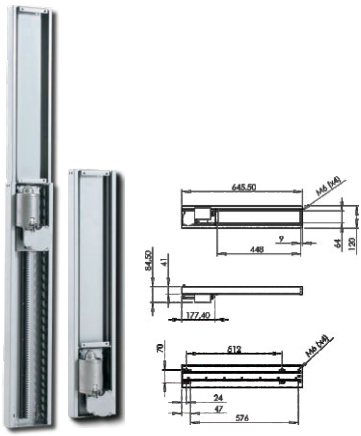

Technical data

Area of application: Used in cabinets for raising and lowering flat screen televisions, kitchen cabinets, desktop screens etc.
Material: Steel
Finish: Silver (RAL 9006)
Mounting method: Suitable for the below VESA standards
- 50 x 50
- 75 x 75
- 100 x 100
- 200 x 100
- 200 x 200

Height of mechanism: 645 mm (closed) to 1105 mm (open)
Stroke: 460 mm
Weight capacity: 50 kg (25 kg for reverse position)
Speed: 25 mm / second
Max TV Size: 24 inch



Set includes radio frequency remote control. Cabinet and screen are not included.

Article No.	Details
421.68.700	Mini-Lift flat screen lift TS460B

Spare Parts:

Article No.	Description
421.68.012	Flexi Wire For Minilift TS460B
421.68.491	RF Control Set For Maxilift / Minilift
421.68.431	Minilift Mounting Brackets Silver

Note: Please use voltage stabilizer to safe guard transformer. Check VESA dimension and height of TV before ordering. Need wall support to avoid vibration & shaking


Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Maxi Lift Electronic Plasma Lift





Imagine your beautiful bedroom with a TV moving elegantly up and out of the foot board or a specially designed end of the bed cabinet. Relaxing in your bed you can now watch TV and conceal it when you're done. When hidden it's out of reach and protected from children and pets.

Article No.	Description	Max. Stroke (Travel)	Max. Load Bearing capacity
421.68.423	Maxilift system for TV	1000mm	100kg



Spare Parts:

Article No.	Description
421.68.491	RF Control Set For Maxilift / Minilift
421.68.009	Lid Lifter For Maxilift
421.68.015	Flexi Wire For Maxilift

Reverse Option: Yes
Max TV Size: 55 inch
Weight Capacity: 100kg (50 kg for reverse position)

Note: Please use voltage stabilizer to safe guard transformer. Check VESA dimension and height of TV (max. 820mm) Need wall support to avoid vibration & shaking

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

QUBIT Rotating Tv Unit Fitting





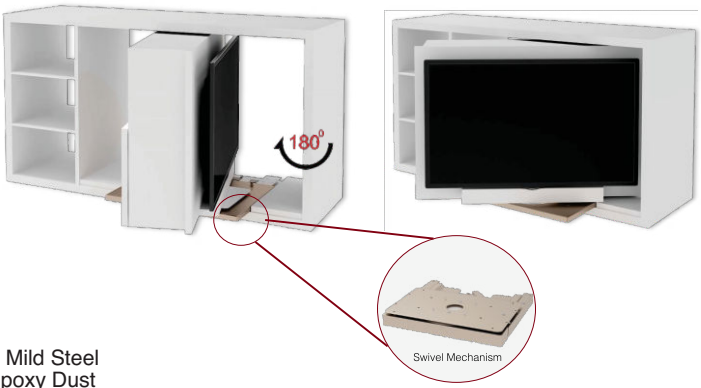


Material: Mild Steel
Finish: Epoxy Dust
Mechanism: Swivel Mechanism for Wooden Furniture
Dimensions: 1170 (W) [maximum] × 480 (D) mm [minimum] (External Furniture Box)

Weight Carrying Capacity:
Swivel Cabinet Furniture: 60 Kg
Objects Placed on the Cabinet: 15 Kg (Including the TV fitting)

Rotation: 180°; Half Rotation

Other Details:
Can Install a TV Fitting up to 32 inches
Manufactured and Tested in Italy

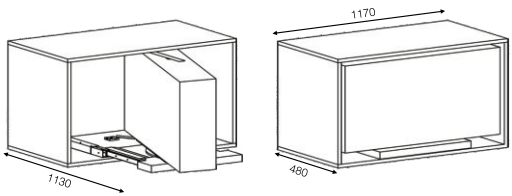

Article No. 646.12.110

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Turntables

360º Revolving fittings for T.V., Bar Stools, Centre Dining Tables, Display Boxes for Jewellery, Watches and other Life Style.
Products Load bearing capacity: 50 kg to 300 kg
Also available in our range is a fibre body revolving fitting for glass table tops which requires no holing to be done.
Load bearing capacity : 50 kg
Dimension (L x W x H):
160 mm x 160 mm x 19 mm

Turntable, Steel Bright, 50kg/ 360º / 160mm



Article No.	Finish
646.14.062	Bright or galvanized

Special Order

Load bearing capacity : 100 kg
Dimension (L x W x H) :
170 mm x 170 mm x 27 mm

Turntable, Steel Bright, 100kg/ 360º / 170mm




Article No.	Finish
646.15.014	Bright or galvanized

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Cabinet Hangers and Levellers

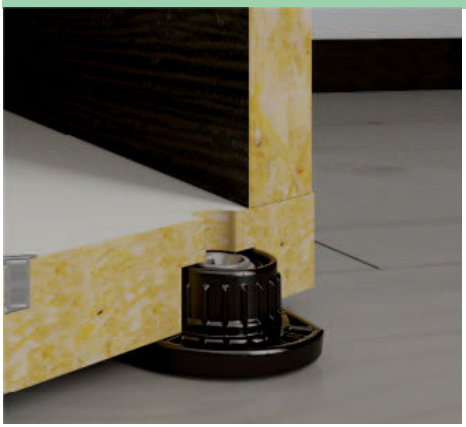






Levelers - Integrato Z

Adjustment: 7-17 mm
Load Capacity: 175 kilos each
Material: Zinc alloy and plastic






Article No.	Description
651.16.300	Integrato Z - Zinc alloy and black plastic

Levelers - Integrato G

Adjustment: 0 - 25 mm
Load Capacity: 175 kilos each
Material: Zinc alloy and plastic





Article No.	Description
637.67.910	Integrato G - Zinc alloy

Levelers - Integrato A



Article No.	Description
637.97.91 I	Integrato A for Target connector - Zinc alloy

Levelers - Atacama J



Article No.	Description
637.23.900	Leveller Atacama J - Zamak Grey
008.28.290	Special Key

Accessories



Article No.	Description
045.08.008	Cover Cap - White plastic

Article No.	Description
356.22.470	Door Buffer - Ethylene vinyl acetate



Article No.	Description
356.20.423	Stiff and soft clear rubber



Article No.	Description
356.20.521	Stiff and soft clear rubber

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Concealed Height Adjustor



Concealed height adjustor suitable to align heavy duty wardrobes, bookcases and modular furniture.

A plastic cover can be used to conceal the housing on the side
Adjustment 0 – 12 mm.
Capacity loading : 150 kilos each

REKORD 12 H 52 mm



Article No.	Description
637.24.001	Raw zinc alloy, steel and grey plastic

Special Order

REKORD 12 H 120 mm



Article No.	Description
637.24.010	Raw zinc alloy, steel and grey plastic

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Wall Hanging Brackets

Visible hanging brackets
Horizontal adjustment: up to 25 mm
Vertical adjustment: up to 28 mm
Loading capacity : up to 65 Kg.
Fixing system: screw-fix,
Material as ABS, dowel-fix
Ø10 mm



Article No.	Handing
290.05.750	Right hand
290.05.751	Left hand

Wall plate, Steel
Size: 26 x 60mm
Loading capacity: up to 200 Kg



Article No.	Finish
290.10.901	Galvanised

Steel Cover for Hanging bracket
Finish : Brushed nickel





Article No.	Handing
290.05.680	Right hand
290.05.681	Left hand

Plastic Cover for Hanging bracket
Finish : White



Article No.	Handing
290.05.682	Right hand
290.05.683	Left hand

Concealed Wall Hanging Brackets

Concealed hanger : with 10mm dowels
Horizontal adjustment: up to 25mm,
Vertical adjustment : up to 18mm,
Loading capacity : up to 65 Kg.
Fixing system : screw-fix, dowel-fix diameter mm Ø8 and diameter mm Ø10.




Article No.	Handing
290.37.900	Right hand
290.37.901	Left hand

White Plastic Cap : (Ø10MM)



Article No.	Finish
290.37.790	White

Wall plate, Steel
Size: 26 x 60mm
Loading capacity: up to 200Kg



Article No.	Finish
290.10.901	Galvanised

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Libra H1 (Concealed overhead cabinet hanger)



Innovative family of concealed cabinet hangers

Resistant and reliable solution thanks to the sensibly thick zinc-coated steel body

Libra H1 is the unhanded version to be fixed behind the rear panel through three wood screws.

Independent vertical and in-depth adjustment to easily and quickly align the cabinet against the wall.

ANTI-TURNOVER device for domestic safety to guarantee fast locking of the cabinet against the wall plate.

Adjustments to be carried out from the inside of the cabinet through a hole covered with alternative designed and small cover caps.

Wide range of very thick and hardened new wall plates concept, as well as one type of wall bar, with optimized position of the fixing oval holes, to facilitate correct positioning and to reduce loading stress either on the wall plates/bar or on the plugs

Capacity loading 75 Kilos per piece (150 Kilos per pair)

Steel, zinc alloy and plastic according to related version

In accordance with the European Regulation DIN 68840

Service gap 15mm behind back panel


Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Libra H1 (Concealed overhead cabinet hanger)



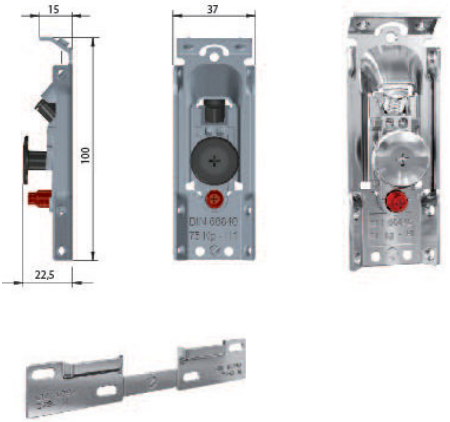

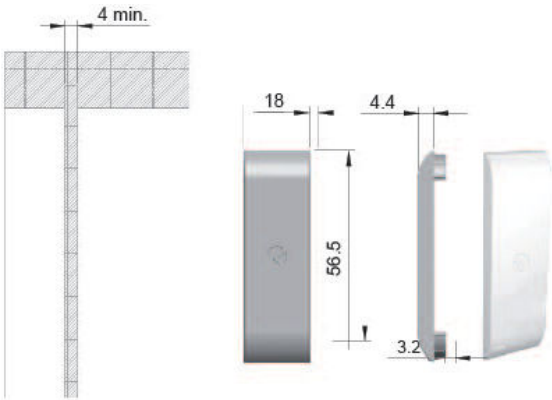

Article No.	Description
290.41.750	Libra H1 (Concealed Cabinet Hanger)

Each Set includes a set of hangers, wall plate, wood screws, plastic cover caps and instruction sheet.

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Libra H7 screw fixing with “peg joint” (Concealed base cabinet hanger)



Libra H7 is a cabinet wall hanging bracket used to hang/float cabinets used in kitchens, living rooms & bathrooms against a wall support. It take cares of units with drawers, swing door & drop down flap stays. 1 set of bracket can support 300 kg of weight



Article No.	Description
290.41.754	Libra H7 (Concealed Cabinet Hanger for livingroom, kitchen units and bathroom units)
290.36.750	Libra H7 Rhs Cover Cap
290.36.751	Libra H7 Lhs Cover Cap

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

LIBRA H7 with “peg joint” for aluminium bar





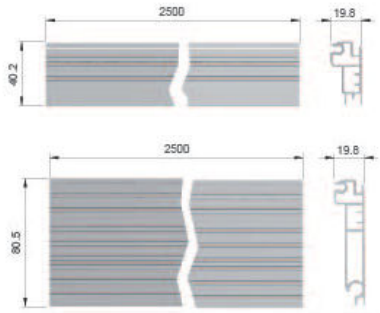

Each Set includes a set of hangers, wall plate, wood screws, plastic cover caps and instruction sheet.

Article No.	Description
290.01.040	Libra H7 Aluminium Bar H 40.2 mm
290.01.081	Libra H7 Aluminium Bar H 80.5 mm

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Wardrobe Fittings and Accessories



Ironing Board

Ironfix: Drawer mounted ironing board is an excellent space saving solution for the bedrooms/ kitchens/laundry/wardrobe etc. The ironing board is built into the drawer and can be accessed easily by simply pulling the drawer open and unfolding the board.
Feature:
Infinitely variable width adjustment for built-in widths between 362 and 500mm
Inside cupboard depth 500mm
Complete set including assembly materials, consisting of: 2 carcase rails. 1 collapsing ironing board support system with pre-assembled 2 part extending runners, folding ironing board
Finish: White powder coated steel and striped fabric ironing board cover.





Article No.	Material: Steel Finish: Plastic Coated White Fittings parts.
568.60.710	

Special Order

Ironfix: Wall mounted ironing board, pre-assembled and easy to mount. Equipped with a turning mechanism (can be swivelled conveniently to the left or to the right up to 90°) **with locking function.**
Cotton cover with a foam lining and an elastic gathering to ensure a good fit.







Article No.	Material: Steel Finish: Plastic Coated White Fittings parts.
568.66.700	

Ironfix Ironing board, cross-ways for built-in installation





Collapsible, rotates 180º, positioning at 15º intervals, completely pre-mounted without front connection
Material: Fitting parts: Steel
Finish: Fitting parts: Plastic coated white, RAL 9016
Intallation depth: 350mm
Installation height: 125mm
Installation width: 520mm

Aluminium coated cotton cover with foam lining and elastic gathering, suitable for all kinds of irons, steam permeable

Article No.	Cover
568.60.793	Aluminium


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Wardrobe Rail

OVA Wardrobe rail: Overall measurements
Material thickness: 1.2 mm
Finish : Steel, Chrome plated






Article No.	Dimensions (LxHxW)
801.10.222	2500 x 30 x 15 mm

Oval Cloth Hanger Rail





Material : Aluminium with Anti-skid Rubber Coating (Rail)
Finish : Black
Weight Bearing Capacity : 10 Kg




Article No.	Description
804.21.303	Hanger Rail 3000 mm
804.21.390	Side Bracket

Special Order

Wardrobe Rail

Material: Aluminium
Finish: Anodized
Material thickness: 1.5 mm
Size: 30 x 15 mm
Length: 3000mm



Article No.	Finish
801.76.623	Silver Anodised

Pull-Outs

Extendable Wardrobe Rail:
For screw fixing beneath shelves
Finish: Steel, Nickel plated



Article No.	Length in mm
805.01.752	260 mm, 8 kg
805.01.761	310 mm, 6 kg
805.01.770	360 mm, 5 kg
805.01.789	410 mm, 4 kg


Extending Trouser Rack
Steel with 10 Trouser Holders
Plastic coated white runner cover
Finish : Polished Chrome plated
Size: (W x D x H)



Article No.	Dimensions (WxDxH)
805.45.204	465 x 480 x 100mm

Wardrobe Rail

Material: Aluminium
Finish: Anodized
Material thickness: 1.5 mm
Size: 30 x 15 mm
Length: 3000mm



Article No.	Finish
801.33.906	Aluminium Anodised
801.76.923	White Aluminium

OVA Wardrobe rail END SUPPORT: End Support for screw fixing to the side panel.



Article No.	Finish
803.33.757	Zinc, Nickel-plated



Article No.	Finish
803.33.756	Zinc, Nickel-plated

Rail end support,
For OVA wardrobe rail



Article No.	Finish
803.04.510	Plastic, Grey


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Wardrobe Lift

Wardrobe lift (PROFESSIONAL)
Screw fixing to the side panels.
Load bearing capacity: 15 kg
Clothes rail: Adjustable
For internal wardrobe width:
870 mm - 1190 mm (adjustable)



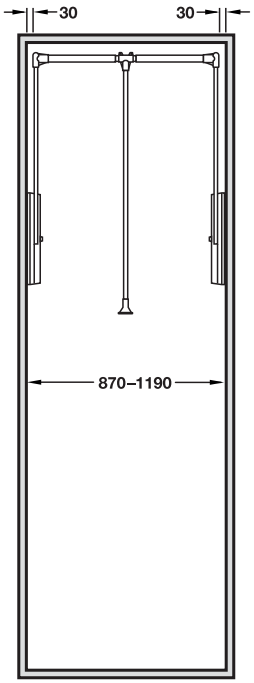


Finish : Chrome Plated / Black

Article No.	Wardrobe Width
805.24.230	870mm - 1190mm

Special Order

Wardrobe lift (BASIC)
Screw fixing to the side panel.
Load bearing capacity: 10 kg
Clothes rail: Adjustable
For internal wardrobe width:
600 mm - 1200 mm (adjustable)



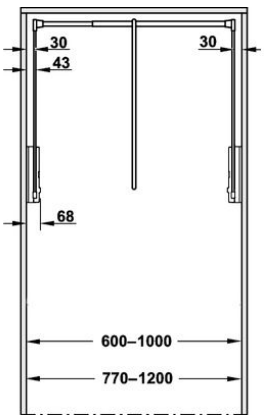

Finish : Chrome Plated / Black


Article No.	Wardrobe Width (internal)
805.20.031	600mm - 1000mm
805.20.055	770mm - 1200mm

Finish : Chrome Plated / White


Article No.	Wardrobe Width
805.20.855	770mm - 1200mm

Wardrobe Lift (ONLY)
Screw fixing to the side panel.
Load bearing capacity: 12 kg
Clothes rail: Adjustable





Mounting Plates



(A) (B)

Finish : White Alu. / Grey

Article No.	Wardrobe Width (internal)
805.21.911	680 mm - 980 mm (A)
805.21.901	761 mm - 1142 mm (A)
805.21.921	761 mm - 1142 mm (B)

Finish : Nickel Plated / White

Article No.	Wardrobe Width
805.21.600	730mm - 1190mm

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Wardrobe Lift

Wardrobe lift with integrated soft opening mechanism
For mounting on side panel, load bearing capacity 10 kg






Specifications:
For internal cabinet width: 750–1,100 mm
Material: Clothes rail and arm: Steel, pull rod and housing: Plastic, connecting parts: Aluminium
Installation: For screw fixing to side panel
Fixing material supplied

Article No.	Description
805.25.101	Brown body, pull rod: Transparent
805.25.301	Black body, arm and clothes rail: Chrome plated, pull rod: Transparent

Cabinet mounted Wardrobe Lift, with Soft closing
Black, 830-1150 mm, 8-10 kg

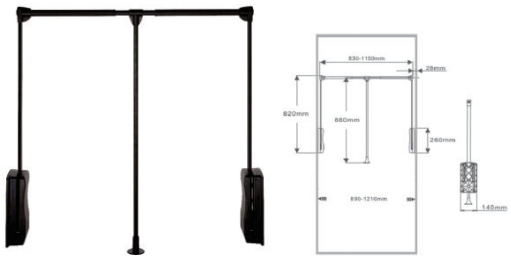

Material : Aluminium (Strap Pipe & Arms), Plastic (Side Cover Cap and Pull Handle)
Finish : Black
Weight Bearing Capacity : 8-10 kg.
Mounting : Attached to either sides of the wardrobe with screws
Integrated Silent Closing Mechanism
The Adjustable Strap Pipe can be extended from 830 mm up to a width of 1150 mm owing to its telescopic structure

Article No.	Cabinet Width	Dimension (W)
805.11.354	890-1210 mm	830-1150 mm

Motorized Wardrobe Lift System
Remote Controlled Space Optimization Mechanism



Article No.	Min. Internal Cabinet Width	Dimension (W)
805.23.162	750-1200 mm	830-1150 mm


Maximum weight carrying capacity: 17kg
Finish: Brown
Internal cabinet width: 750 to 1200 mm
Control type: Remote control
Input voltage: 100-240VAC, 50-60Hz
Power consumption: 60W
Remote control power supply: 3V lithium battery
Ambient operating temperature range: 10¼C to 40¼C

Dimensional data not binding. We reserve the right to alter specifications without notice.

Storage Box








Material:Aluminium (Frame), Wood (Base),
Felt (Storage Box Interior),Steel (Runners)
Finish: Black (Frame), Biscuit Brown
(Storage Box Interior)
Weight Bearing Capacity: 30kg
Runners: Soft Closing
Width Adjustment: 50mm(25mm one ither side)

Article No.	External Cabinet Width	Dimension (WxDxH)
807.95.301	600 mm	564x475x80 mm
807.95.304	900 mm	864x475x80 mm

Leather Storage Box





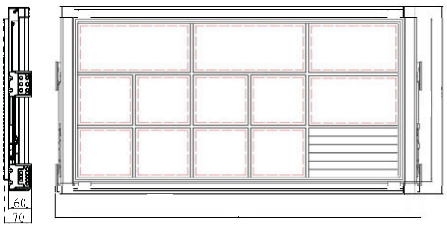

Material : Aluminium (Frame), Wood (Base),
Leather(Storage Box Interior), Steel (Runners)
Finish : Black (Frame),
Peanut Brown (Storage Box Interior)
Weight Bearing Capacity : 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm (25 mm on either side)

Article No.	External Cabinet Width	Dimension (WxDxH)
807.96.331	600 mm	564x475x80 mm
807.96.334	900 mm	864x475x80 mm

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Semi-open Storage Box





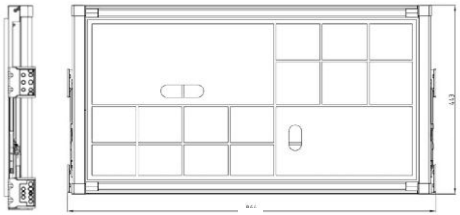

Material : Aluminium (Frame),
Wood (Storage Box), Steel(Runners)
Finish: Black (Frame),
Beige (Storage Box Interior)
Weight Bearing Capacity: 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm
(25 mm on either side)


Article No.	External Cabinet Width	Dimension (WxDxH)
807.96.344	900 mm	864 × 475 × 80 mm

Metal Box





Material : Aluminium (Frame),
Perforated Steel (Metal Box), Steel (Runners)
Finish: Black
Weight Bearing Capacity: 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm
(25 mm on either side)



Article No.	External Cabinet Width	Dimension (WxDxH)
807.95.351	600 mm	564x475x150 mm
807.95.354	900 mm	864x475x150 mm

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.

Pvc Rattan Basket





Article No.	External Cabinet Width	Dimension (WxDxH)
807.96.351	600 mm	564x475x170 mm
807.96.354	900 mm	864x475x170 mm

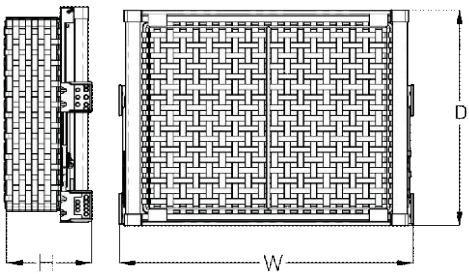


Material : Aluminium (Frame),
PVC Rattan (Basket), Steel (Runners)
Finish : Black (Frame), Dark Brown (Basket)
Weight Bearing Capacity : 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm
(25 mm on either side)

Trouser Pull-out





Material : Aluminium (Frame), Steel (Runners)
Aluminium with Anti-skid Rubber Coating (Braces)
Finish : Black
Weight Bearing Capacity : 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm (25 mm on either side)
Position of Braces : Adjustable

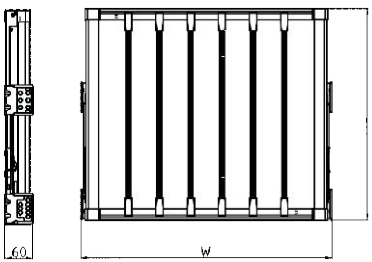

Article No.	External Cabinet Width	Dimension (WxDxH)
807.95.321	600 mm	564x475x60 mm
807.95.324	900 mm	864x475x60 mm
807.95.329	Extra Black Rods for Trouser Pull Out	

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Multi-function Trouser Pullout





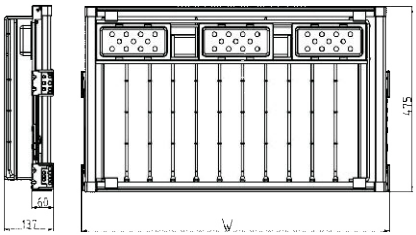

Material : Aluminium (Frame),
Steel (Runners), Plastic (Trays),
Aluminium with Anti-skid Rubber Coating (Braces)
Finish : Black
Weight Bearing Capacity : 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm (25 mm on either side)
Position of Braces : Fixed


Article No.	External Cabinet Width	Dimension (WxDxH)
807.95.311	600 mm	564x475x140 mm
807.96.314	900 mm	864x475x140 mm

Shoerack Pull-out





Material : Aluminium (Frame),
Steel (Runners), Perforated
Steel (Shoe Holder)
Finish : Black
Weight Bearing Capacity : 30 kg
Runners : Soft Closing
Width Adjustment : 50 mm
(25 mm on either side)

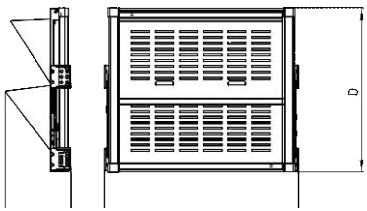

Article No.	External Cabinet Width	Dimension (WxDxH)
807.95.361	600 mm	564x475x180 mm
807.95.364	900 mm	864x475x180 mm

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Shoe Rack

Shoe Rack for Screw Fixing
Wall Rail: 460-750 mm in Length
Rail: Chrome Plated
black with black plastic end caps





Article No.	Description
892.12.906	Shoe Rack for screw fixing to wall or wall rail width 460-750 mm Chrome Plated



Article No.	Description
892.12.990	Wall Rail

Wall rail for shoe rack continuously adjustable to be used with article **892.12.906**




Note: Number of shoe racks will depend on the height of the rail

Shoe Rack fitting for 3 compartments for installation in shoe cupboards
Material: Plastic
Colour: Black & White Aluminium RAL 9006



Shoe rack fitting for 3 compartments
For installation in shoe cupboards



Installation Dimension:



Article No.	Colour
892.14.353	Plastic, Black
892.14.253	White Aluminium RAL 9006

Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.


Rotating Shoe Rack



Material : Aluminium (Frame),
Steel (Runners and Panels)
Finish: Black
Weight Bearing Capacity: 4 kg per panel
Soft Opening and Closing
Rotation : 180˚ on both sides


Article No.	Minimum Internal Cabinet Height	Dimension (WxDxH)
807.95.322	725-775 mm	700 x 340 x 725-775 mm
807.95.323	1920-2190 mm	700 x 340 x 1920-2190 mm

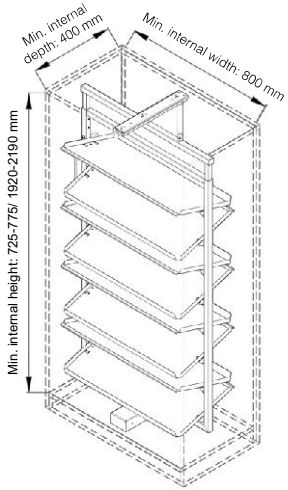



Top of the shoe rack

Bottom of the shoe rack





Special Order

Stock Available


Dimensional data not binding. We reserve the right to alter specifications without notice.


Side Storage Rack




Material : Aluminium (Frame),
Steel (Runner, Basket, Shelf)
Finish: Black
Weight Bearing Capacity: 30 kg
Runners : Soft Closing
Minimum Cabinet Depth : 500 mm



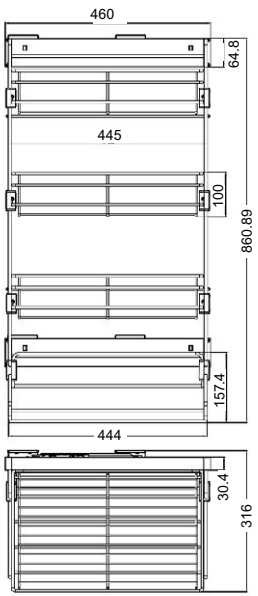

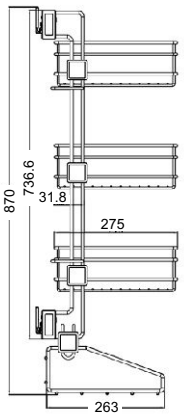



Article No.	Min. External Cabinet Dimension (W×D)	Dimension (WxDxH)
807.95.381	400 × 500 mm	316 × 460 × 870 mm (R)
807.95.380	400 × 500 mm	316 × 460 × 870 mm (L)

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Tie and belt rack



Material: Aluminium Track with Plastic Base
Finish : Transparent
Suitable for: 8 Belts
Integrated Soft Closing Mechanism
Installation: For screw fixing, hole spacing 64 mm
Area of application: For trousers, skirts, scarves and ties

Article No.	Dimension (WxDxH)
807.27.050	505 x 85 x 82 mm



Material: Aluminium Track with Plastic Base
Finish : Transparent
Suitable for: 32 Ties
Integrated Soft Closing Mechanism
Installation: For screw fixing, hole spacing 64 mm
Area of application: For trousers, skirts, scarves and ties

Article No.	Dimension (WxDxH)
807.28.050	505 x 85 x 82 mm

Hook



Stainless Steel Hook,
dia 20 mmx35 Mm

Article No.	Finish
842.57.090	Aluminium

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Top Mounted Hanger



Material: Steel
Finish : Black
Weight Bearing Capacity : 10 kg.
Integrated Soft Closing Mechanism
Hook Points : 9

Article No.	Dimension (WxDxH)
805.00.350	84 x 444 x 156 mm



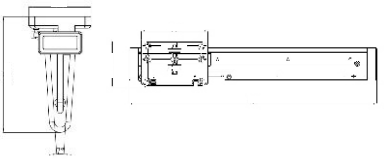

Side Mounted Tie Rack



Material: Steel
Finish : Black
Weight Bearing Capacity : 10 kg.
Integrated Soft Closing Mechanism
Hanging points : 9

Article No.	Dimension (WxDxH)
807.96.310	168 x 444 x 85 mm



Pull out tie holder with Dispenser plate, For 20 ties



Material: Aluminium
Finish : Black
Weight Bearing Capacity : 10 kg.
Integrated Soft Closing Mechanism
Hanging points : 20

Article No.	Dimension (WxDxH)
807.21.931	168 x 444 x 85 mm


Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Planofit - Panel Straightening Fitting



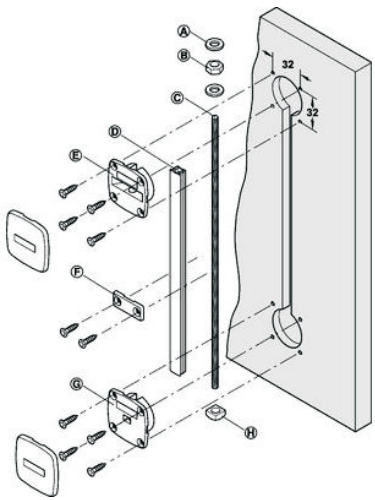

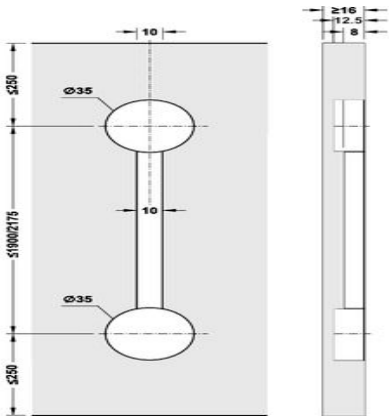

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Planofit - Panel Straightening Fitting

Accessories: Recommended for all sliding wooden doors to prevent warping.

PLANOFIT: Panel Straightening fitting that prevents the panel from warping or straightens panels which have warped.

Area of application: Prevents doors warping in either direction or straightens doors which have become warped by 5mm
Door height: Max. 2,400 mm or 2,650 mm.
Door thickness: From 16 mm.
Installation: Allows retro active adjustment of the warped panel which have become warped.

Set consisting of:
1 threaded rod
1 trim strip
2 tensioners
1 hexagonal nut
1 square nut
2 lock washers

(Suitable for MDF & Particle Board only)

Article No.	Door height
407.90.220	Product 1930mm compatible with door height of 2400mm
407.90.221	Product 2195mm compatible with door height of 2650mm
407.90.241	Cover cap pl. black for casing
407.90.250	Securing plate pl. black

Note: For width of door more than 600mm use 2 sets of fittings
Note: Please order 2 cover caps & 4 plastic securing plate additionally for each set

Dimensional data not binding. We reserve the right to alter specifications without notice.

Special Order

Stock Available

Drawer Runners



Dimensional data not binding. We reserve the right to alter specifications without notice.

Drawer Runners

Ball Bearing Runner
Product Features:
Mounting: Side Mounted
Material: Mild Steel
Finish: Zinc Galvanized / Black
Weight Bearing Capacity:
30 kg per pair
Extension: Full extension for all sizes
Available Sizes: 250 to 550 mm



Finish: Zinc Galvanized

Article No.	Length
422.87.900	250 mm
422.87.901	300 mm
422.87.902	350 mm
422.87.903	400 mm
422.87.904	450 mm
422.87.905	500 mm
422.87.906	550 mm

Finish: Black

Article No.	Length
422.87.300	250 mm
422.87.301	300 mm
422.87.302	350 mm
422.87.303	400 mm
422.87.304	450 mm
422.87.305	500 mm
422.87.306	550 mm

Special Order

Ball Bearing Runner
Product Features:
Mounting: Side Mounted
Material: Mild Steel
Finish: Zinc Galvanized / Black
Weight Bearing Capacity:
45 kg per pair
Extension: Full extension for all sizes
Available Sizes: 250 to 700 mm



Finish: Black

Article No.	Length
422.58.325	250 mm
422.58.330	300 mm
422.58.335	350 mm
422.58.340	400 mm
422.58.345	450 mm
422.58.350	500 mm
422.58.355	550 mm
422.58.360	600 mm
422.58.365	650 mm
422.58.370	700 mm

Finish: Zinc Galvanized

Article No.	Length
422.58.925	250 mm
422.58.930	300 mm
422.58.935	350 mm
422.58.940	400 mm
422.58.945	450 mm
422.58.950	500 mm
422.58.955	550 mm
422.58.960	600 mm
422.58.965	650 mm
422.58.970	700 mm

Stock Available

Drawer Runners

Soft Close Ball Bearing Runner
Product Features:
Mounting: Side Mounted
Material: Mild Steel
Finish: Zinc Galvanized / Black
Weight Bearing Capacity:
40 kg per pair
Extension: Full extension
for all sizes
Available Sizes: 300 to 600 mm

40 kg Pair



Finish:Black

Article No.	Length
432.02.131	300 mm
432.02.132	350 mm
432.02.133	400 mm
432.02.134	450 mm
432.02.135	500 mm
432.02.136	550 mm
432.02.137	600 mm

Finish: Zinc Galvanized

Article No.	Length
432.02.191	300 mm
432.02.192	350 mm
432.02.193	400 mm
432.02.194	450 mm
432.02.195	500 mm
432.02.196	550 mm
432.02.197	600 mm

Special Order


Push to Open + Soft Close
Runners

40 kg Pair



New

Material: Mild Steel
Finish: Zinc Galvanized / Black
Weight Bearing Capacity:
40 kg per pair
Extension: Full extension
Cycle Tested: 50000 Cycle



Touch area on drawer front panel
for proper functioning.

Finish: Zinc Galvanized

Article No.	Length
422.02.721	300 mm
422.02.722	350 mm
422.02.723	400 mm
422.02.724	450 mm
422.02.725	500 mm
422.02.726	550 mm

Finish:Black

Article No.	Length
422.02.321	300 mm
422.02.322	350 mm
422.02.323	400 mm
422.02.324	450 mm
422.02.325	500 mm
422.02.326	550 mm

300mm and 350mm NL- Till 500mm Drawer width
400mm to 550mm NL- Till 700mm Drawer width

Econo Box :
Self closing drawer System slide with double stop Single extension.
Load bearing capacity : 25 kg.
Finish : Steel, epoxy coated Cream RAL9001.



Article No.	Height	Length
555.93.440	54 mm	400 mm
555.94.440	86 mm	400 mm
555.95.440	118 mm	400 mm

Push to open
Ball Bearing Runner
Product Features:
Mounting: Side Mounted
Material: Mild Steel
Finish: Zinc Galvanized
Weight Bearing Capacity:
40 kg per pair
Extension: Full extension
for all sizes
Available Sizes: 300 to 600 mm

40 kg Pair



Finish: Zinc Galvanized

Article No.	Length
422.02.061	300 mm
422.02.062	350 mm
422.02.063	400 mm
422.02.064	450 mm
422.02.065	500 mm
422.02.066	550 mm
422.02.067	600 mm

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

HÄFELE

Table and Desk Fittings



Height Adjustable Table Fittings



633.50.867	ALTI 120

Material: Steel
Finish: Powder Coated
Colour Grey RAL 9006
Feet Dimensions: 700 × 70 mm
Leg Dimensions: 3 telescopic tubes – 80 × 50 mm, 75 × 45 mm and 70 × 40 mm
Input: 110/ 230 V
Suggested Worktop Size (Width × Depth): 1200 -1800 × 600 - 800 mm
Bluetooth: Available
Supplied with: Legs × 2, Feet × 2, Frame Ends × 2, Centre Rails × 2, Side Brackets × 2, Power Cable × 1 and Cable × 1, Screws
Control Box for Alti 120 × 1
Handset for Alti 120 × 1
Bluetooth receiver × 1
Operated through: Handset and AiDesk mobile application

HANDSET FOR ALTI 120



The handset controls different operations of Alti 120 and carries out the following functions:
• Changes and fixes the height of the table which is displayed through the LED Display
• Saves selected positions in the memory function
• Comes with a USB charging slot
• Changing settings like upper and lower limit, anti-collision sensitivity, etc.,

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Height Adjustable Table Fittings



633.50.868	ALTI 80

Material: Steel
Finish: Powder Coated
Colour: Grey RAL 9006
Foot Dimensions: 500 × 500 mm
Leg Dimensions: 3 telescopic tubes – 70 × 70 mm, 60 × 60 mm and 50 × 50 mm
Input: 110/ 230 V
Suggested Worktop Size (Width × Depth): ≤ 800 × 800 mm
Bluetooth: Available
Supplied with: Leg × 1, Foot × 1, Top Mounting Bracket × 1, Power Cord × 1 and Cable × 1, Screws
Control Box for Alti 80 × 1
Handset for Alti 80 × 1
Bluetooth receiver × 1
Operated through: Handset and AiDesk mobile application

HANDSET FOR ALTI 80



The handset is used to increase or decrease the height of Alti 80.

Special Order

Stock Available

Table top swivel fitting

Swivel Table

Width: max. 1200mm
Depth: max. 600mm
Panel Thickness:
Top Panel: ≥ 25mm
Side Panel: ≥ 28mm









Article No.	Size
646.31.004	Table top swivel fitting

Note: Castors needs to order separately 661.05.320 (For Hard Surface) or 661.05.330 (For Soft Surface)

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


Furniture Castors

Dimensional data not binding. We reserve the right to alter specifications without notice.

Tandema 50 twin wheel castor with mounting plate
Load bearing capacity: 50 kg per castor
Wheel Diameter: 50mm
Finish: Plastic, matt black


Without brake



With brake



Article No. Brake	Article No. Without Brake	Installation Height
660.08.321	660.07.321	63 mm

Twin wheel castor with mounting plate but without brake
Load bearing capacity: 25 kg per castor
Wheel Diameter: 35mm
Finish: Plastic, matt black





Article No.	Installation height
660.07.301	48 mm

Special Order

Swivelling castor: Press fitted in a housing of Ø 40mm
Load bearing capacity: 50 kg per castor
Finish: Plastic, black
Castor: Hard Plastic



Article No.	Wheel Diameter
661.04.309	15 mm

Ball castor: Recessed mounted
Material: Steel
Finish: Yellow Chromatized housing, chrome plated ball



Article No.	Recess Part Ø mm
661.02.210	16 mm
661.02.230	23.5 mm
661.02.250	33 mm

Castor: For forword/backward running only. Preferably for bed storage pull-outs
Load bearing capacity: 40 kg per castor
Finish: Steel housing Galvanized, white plastic wheel
Running surface: Hard floors
Castor: Hard Plastic



Article No.	Installation Height
660.98.904	41 mm

Stock Available

Furniture Glides

Width: Plastic
Height: 5mm
Colour: White
Diameter:18mm
Installation: Knocking in



Article No.	Diameter in mm
650.02.190	19 mm

Material: With Intermediate Plastic layer, base in Grey felt
Height: 9mm
Diameter: 20mm
Installation: Screw fixing



Article No.	Diameter in mm
650.20.720	20 mm

Material: Brown Felt
Thickness: 3.5mm
Colour: Brown
Installation: Glue fixing (self adhesive)



Round

Article No.	Diameter in mm
650.06.103	20 mm
650.06.105	24 mm

Material: Brown Felt
Thickness: 3.5mm
Colour: Brown
Installation: Glue fixing (self adhesive)



Square

Article No.	Size in mm
650.06.121	20 x 20 mm

Special Order

Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.


HÄFELE

Screws and Jigs




Fixing Screws

Hospa Chipboard Screws, Countersunk Head with Full Threading
Finish : Steel, Nickel Plated
MOQ: 1000 pcs




Article No.	Diameter x Length
015.35.637	3.5 mm x 15 mm
015.35.824	4.0 mm x 15 mm
015.35.833	4.0 mm x 17 mm
015.35.842	4.0 mm x 20 mm

Hospa Chipboard Screws, Countersunk Head with Full Threading
Finish : Steel, Galvanized
MOQ: 1000 pcs




Article No.	Diameter x Length
015.31.620	3.5 mm x 13 mm
015.31.657	3.5 mm x 20 mm
015.31.675	3.5 mm x 25 mm
015.31.951	4.5 mm x 35 mm (MOQ: 500 pcs)

Hospa Chipboard Screws, Countersunk Head with Full Threading
Finish : Steel, Galvanized
MOQ: 1000 pcs



Article No.	Diameter x Length
015.31.255	2.5 mm x 16 mm
015.31.335	3.0 mm x 15 mm
015.31.540	3.0 mm x 17 mm
015.31.639	3.5 mm x 15 mm
015.31.648	3.5 mm x 17 mm
015.31.853	4.0 mm x 25 mm
015.31.871	4.0 mm x 35 mm (MOQ: 500 pcs)
015.31.942	4.5 mm x 30 mm

Hospa Chipboard Screws, Countersunk Head with Partly Threading
Finish : Steel, Galvanized
MOQ: 500 pcs




Article No.	Diameter x Length
015.41.886	4.0 mm x 40 mm (MOQ: 500 pcs)
015.41.966	4.5 mm x 40 mm (MOQ: 500 pcs)

Flat Head Combination Cross Slot Screw
Finish : Steel, Galvanized



Article No.	Diameter x Length
022.35.252	4 mm x 25 mm (MOQ: 200 pcs)
022.35.305	4 mm x 30 mm (MOQ: 100 pcs)

Hospa Chipboard Screws, Countersunk Head with Partly Threading
Finish : Steel, Galvanized
MOQ: 5000 pcs



Article No.	Diameter x Length
017.01.944	4.5 mm x 30 mm
015.01.971	4.5 mm x 45 mm (MOQ: 3000 pcs)

Special Order


Stock Available

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Unitool

Multi Drilling Jig: For precision drilling of Minifix connectors, concealed hinges, Mounting plates, System 32 mounting panels

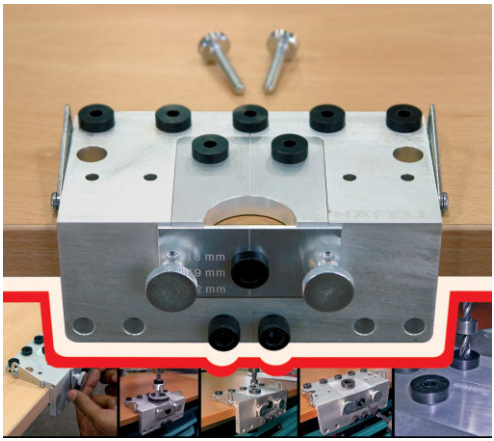

Supplied with:

1 Basic jig with stop plate and drilling sleeves for Ø 5 mm drill holes
1 Replaceable drilling jig for System 32
1 Drill guide for drilling holes in edges of 16/19/22 mm
1 Drill guide for drilling holes in edges of 15/18/18 mm
4 Drilling sleeves Ø 8 mm
2 Marking pins for depth gauge
1 Allen key SW 2

Article No.	Description
001.25.000	Unitool multi drilling jig
Also order	
001.25.031	Drill guide for Ø 35mm
001.25.023	Drill guide for Minifix 15, d=34 mm
001.28.129	Depth gauge

Special Order

Stock Available

Mumbai Design Centre:
Haji Moosa Patrawala Ind.(SOBO)
Estate, Near Famous Studio,
Mahalaxmi (West), Mumbai - 400 011
Tel.: 022 6264 7100

Mumbai Design Centre:
#2 Filix Building, Opp. Asian Paints,
L.B.S. Marg, Bhandup (West),
Mumbai - 400 078
Tel.: 022 2596 9660 / 2596 9787 /
2594 7305

Pune Design Centre:
Showroom No. 2, Ground Floor,
F P No. 403, A/2, ICC Trade Tower,
Senapati Bapat Marg,
Shivaji Nagar, Pune - 411 016
Tel.: 020 2563 3301
Fax: 020 2563 3302

Pune Office:
Office No. 12, Vastushree Complex,
Survey No.587,
Near Hyde Park, Gultekdi,
Market Yard, Pune - 411 037
Tel.: 020 2426 6264
Fax: 020 2426 6274

Ahmedabad Office:
Häfele India Pvt. Ltd., Office No. 302,
3rd Floor, Shangrila Arcade, Near
Shyamal Cross Road, Satellite,
Ahmedabad - 380 015
Tel.: +91 79695 55505 / 88662 20505

New Delhi Office & Design Centre:
D-89 , 1st Floor, Okhla Phase-I,
New Delhi - 110 020
Tel.: 011 6657 4999
Fax: 011 4160 5482

Chandigarh Office:
Godrej Eternia, Wing A, 2nd Floor,
WL2, Plot No.70, Industrial Area
Phase I, Chandigarh - 160 002
Mob.: +91 85588 44448

Jaipur Office:
Airport Plaza, Plot No.15, 1st & 2nd
floor, Tonk Road, Next to Cocoon
Hospital, Jaipur, Rajasthan - 302 016
Mob.: +91 98887 77796

Kolkata Design Centre:
PS PACE, Premises No. 1/1A,
Mahendra Roy Lane, Topsia,
Kolkata - 700 046
Tel.: 033 4008 6814 / 4008 9268
Fax: 033 2498 8020

Kolkata Office:
Office No. 1001, PS Continental,
10th Floor, 83/2/1 Topsia Road,
Near Vishwakarma Building.
South Kolkata - 700 046
Tel: 033 2285 0104 / 5 / 6

Bangalore Office & Design Centre:
Incubex Nestavera Spaces Pvt Ltd,
No:13, Langford Place, Langford
Road, Shanti Nagar,
Bangalore - 560 025
Tel.: 080 4132 6116
Fax: 080 4132 6226

Bangalore
Häfele Appliances Gallery:
No. 2/1, Shiv Manor, Langford Road,
Shantinagar, Bangalore - 560 027
Tel.: 080 4142 6336

Hyderabad Office & Design Centre:
SJR Building - # 1-57/89/1 & 1-57/89/2
Opp Allahabad Bank, Gachibowli,
Hyderabad - 500 032
Tel.: 040 2955 7578 / 88

Chennai Office & Design Centre:
1st Floor No.24, College Road,
Nungambakkam, Chennai - 600 006
Tel.: 044 4215 1542
Fax: 044 2446 0922

Cochin Office:
Jomer Symphony, 5th Floor, 48/1744
C34, Chalikkavattom, North
Ponnurunni, Vyttila, Cochin - 682010

Sri Lanka:
Häfele Office and Design Centre:
52, Nandana Gardens
(On Duplication Road), Colombo 04.
Tel: +94 112 500 501
Fax: +94 112 500 553

Häfele Design Centre:
448, Galle Road, Rawathawatta,
Moratuwa, Sri Lanka.
Tel.: +94 112 644 600

Häfele Design Centre:
752, Peradeniya Rd,
Kandy, Sri Lanka.
Tel.: +94 812 223 338

Bangladesh Office:
2nd Floor, House - 181, Road - 2,
Mohakhali DOHS, Dhaka - 1206.
Tel.: 018 4401 8431 / 32 / 33 / 37

Bangladesh Design Center:
House - 106, Road - 12,
Block - E, Banani, Dhaka - 1213
Tel.: +880 2 - 4881 0380 / 81

Nepal:
UHS Holdings Pvt. Ltd.
Kathmandu-2, Gairidhara Chowk,
Nepal.
Mob.: +977 98023 38800

Bhutan:
SMART HOMES
Gr. Floor, Druk Building (Opp Helipad)
Babesa -Thimpu Expressway, Thimpu
Tel.: +975 - 2 - 333 419
Mob.: +975 - 7727 7615 / 1783 9717 /
7711 4228 / 1760 0663 / 1766 9840

HÄFELE

Maximising the value of space. Together.

Office No. 3, Building “A”, BETA, I Think Techno Campus, Off J.V.L.R, Opp. Kanjurmarg East, Mumbai – 400 042.
Tel: 022 6142 6100 | **Fax:** 022 6702 0531.

Toll Free Customer Care No.:1800 266 6667
Customer Care WhatsApp No.: +91 9769111122
info@hafeleindia.com

customercare@hafeleindia.com

Follow us on

GET IT ON Google Play

Download on the App Store

Furniture Fittings_Vol-19_Article No: 732.98.388 01/02/2024